

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-137-20638-00-00
Spot: NENWNENE Sec/Twnshp/Rge: 34-3S-24W
30 feet from N Section Line, 899 feet from E Section Line
Lease Name: H & G UNIT Well #: 1-34
County: NORTON Total Vertical Depth: 3810 feet

Operator License No.: 34704
Op Name: SHOESTRING RESOURCES, LLC
Address: 535 S. FULTON
LENORA, KS 67645

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	328		225 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 04/12/2013 12:00 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DON Company: INTEGRITY DRILLING CO., LLC Phone: (785) 434-6166

Proposed Plugging Method: Ordered 255 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN WitnessType: NONE
Date/Time Plugging Completed: 04/12/2013 12:30 AM KCC Agent: DAVID WANN

Actual Plugging Report:

Perfs:

1st plug @3754 w/50 sx
2nd plug @2030 w/25 sx
3rd plug @1355 w/100 sx
4th plug @370 w/40 sx
5th plug @40 w/10 sx

Rathole 30 sx


Remarks: ALLIED

Plugged through: DP

KCC WICHITA
MAY 28 2013
RECEIVED

District: 04

Signed

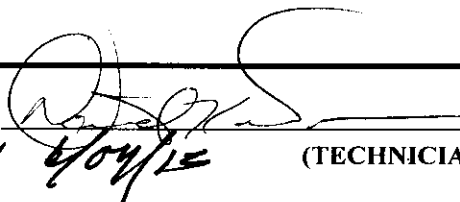

(TECHNICIAN)

CM

MAY 15 2013