

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-195-20765-00-00
Spot: NENENW Sec/Twnshp/Rge: 28-12S-22W
4950 feet from S Section Line, 2970 feet from E Section Line
Lease Name: DREILING Well #: 1
County: TREGO Total Vertical Depth: 4081 feet

Operator License No.: 6037
Op Name: STAAB OIL CO., A GENERAL PARTNER
Address: 1607 HOPEWELL RD
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4081		170 SX
SURF	8.625	230		150 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 06/19/2013 8:00 AM
Plug Co. License No.: 6426 Plug Co. Name: EXPRESS WELL SERVICE & SUPPLY INC
Proposal Rcvd. from: FRANCIS C. STAAB Company: EXPRESS WELL SERVICE & SUPPL Phone: (785) 625-5013

Proposed Plugging Method: Ordered 350 sx 60/40 pozmix 4% gel cement, 16 sx gel and 400 # hulls.
Port Collar at 1785' w/400 sx cement. Cement circulated.
Perforations at 3998' to 4003' and 3988' to 3992'.

Plugging Proposal Received By: CASE MORRIS WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/19/2013 12:30 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

Ran tubing to 3903' and pumped 16 sx gel followed by 50 sx cement w/100 # hulls.
Pulled tubing to 1860' and pumped 243 sx cement w/200 # hulls. Good circulation of cement.
Pulled tubing out. Topped off with 15 sx cement. Hole standing full.
Tied on to back side and squeezed with 15 sx cement. Shut in pressure 300 psi.

GPS: 38.98546 -099.77126

Perfs:

Remarks: ALLIED CEMENT TICKET # 54135

Plugged through: TBG

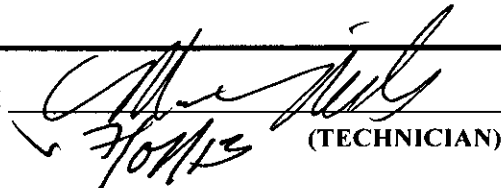
KCC WICHITA

JUN 26 2013

RECEIVED

District: 04

Signed


(TECHNICIAN)

CM

JUN 20 2013