

15-195-00259-0001

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Trego County, Sec. 9 Twp. 13S Rge. 21 (E) (W) X

Location as "NE/CNW/SW" or footage from lines N/2 NE/4

Lease Owner Glen E. Armour dba Western Oil Field Service

Lease Name Keller Well No. 1

Office Address P. O. Box 163 Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 12-16-64 19

Application for plugging approved 12-17-64 19

Plugging commenced 12-22-64 19


Plugging completed 12-23-64 19

Reason for abandonment of well or producing formation

Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

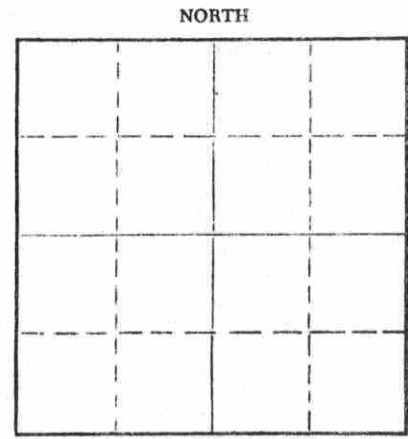

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation Depth to top Bottom Total Depth of Well 3919 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUR IN	PULLED OUT
				8 5/8	210	None
				5 1/2	None	703

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Cleaned out cellar.

Sanded to 3875'. Dumped 5 sacks of cement. Working pipe. Shot pipe at 700'. Circulated 30 sacks of mud. Pumped in 20 sacks of cement at 540'. Pumped in 20 sacks of cement at 200'. Capped well with 10 sacks of cement.

Pulled pipe.

RECEIVED
STATE CORPORATION COMMISSION

DEC 30 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.

J. O. Forbes

(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

J. O. Forbes
P. O. Box 221 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 29 day of December, 1964

(Signature)

My commission expires May 27, 1965

Notary Public.

KELLER #1

LOCATION: SE NW NE - Sec. 9,
Twp. 13.S, Rge. 21.W,
Trego County, Kansas

CONTRACTOR: Thunderbird Drilling, Inc.
1311 Union National Bank Bldg.
Wichita 2, Kansas

SURFACE CASING: 8 5/8" set at 209' with 125 sacks cement,
2% gel, 2 sacks Calcium Chloride

OIL STRING: None

ELEVATION: 2215' K.B.
2212' D.F.
2210' G.L.

COMMENCED: October 8, 1955

COMPLETED: October 24, 1955

RECEIVED
STATE CORPORATION COMMISSION

JAN 6 1965

CONSERVATION DIVISION
Wichita, Kansas

WELL LOG

0 -	40	Shale
40 -	70	Sand
70 -	209	Shale & Shells
209 -	595	Shale
595 -	790	Sand & Shale
790 -	1030	Shale
1030 -	1200	Sand
1200 -	1600	Shale
1600 -	1640	Anhydrite
1640 -	2175	Shale
2175 -	2255	Lime & Shale
2255 -	2420	Broken Lime
2420 -	3300	Lime & Shale
3300 -	3772	Lime
3772 -	3801	Lime & Shale
3801 -	3815	Lime
3815 -	3868	Lime & Chert
3868 -	3897	Lime & Chert & Shale
3897 -	3943	Lime
3943		Rotary Total Depth

The undersigned, Charles W. Aikins, Jr., an officer of Thunderbird Drilling, Inc., hereby certifies that the above is a true and correct log of the formations encountered in the drilling of the #1 Keller as shown in the daily drilling reports.

THUNDERBIRD DRILLING, INC.

Charles W. Aikins, Jr.
Charles W. Aikins, Jr., Pres.

Subscribed and sworn to before me
this 26th day of October, 1955.

Leta Helm
Leta Helm - Notary Public

My commission expires:
August 25, 1956

