


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Harper County. Sec. 9 Twp. 31 Rge. 8 (E) (W)
Location as "NE/CNWSW" or footage from lines. SW/SW/SE
Lease Owner Globe Construction Company
Lease Name Culver Well No. #2
Office Address 1041 N. Water Street, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed Yes 19____
Application for plugging approved Yes 19____
Plugging commenced 2-18 19 57
Plugging completed 2-23 19 57
Reason for abandonment of well or producing formation _____

NORTH

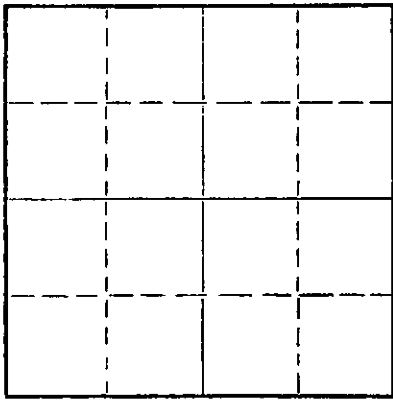

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. M.A. Rives
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4481' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		3611'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured into TD 4481'.
Plugging started 2-18-57. Finished 2-23-57.
Plugged off bottom with sand to 4380' and dumped 5 sacks cement with bailer and shot 5 1/2" casing at 3611'. Pulled pipe out of hole and plugged well with heavy mud to 200' and set permanent rock bridge. Dumped 25 sacks cement. Filled hole with mud to 35' and mixed 10 sacks cement for cap on well.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co.
Address Box 221, Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
J.O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.O. Forbes
Box 221, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 25th day of February, 1957.

My commission expires November 8, 1960.

Retha J. Gibson
STATE CORPORATION COMMISSION Notary Public.

PLUGGING
FILE SEC 9 T 31 R 8 E W
BOOK PAGE 140 LI E 45

FEB 26 1957
2-26-57
CONSERVATION DIVISION
Wichita, Kansas