


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above  
Section Plat

Saline County. Sec. 32 Twp. 16 Rge. 1W (XX) (W)  
Location as "NE/CNW&SW&" or footage from lines. C N/2 SE NE  
Lease Owner E. K. Carey Drilling Company  
Lease Name Anderson Well No. 3  
Office Address P. O. Box 620 McPherson, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) depleted-Oil  
Date well completed July 31, 19 53  
Application for plugging filed December 6, 19 61  
Application for plugging approved December 6, 19 61  
Plugging commenced February 5, 19 62  
Plugging completed February 5, 19 62  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Cecil M. Jones  
Producing formation Depth to top Bottom Total Depth of Well 2622 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with sand from T. D. 2622' back to 2590' ran 5 sacks cement with dump bailer. Shot off and pulled 5 1/2" casing. Filled hole with mud from 2555' back to 200' set a 15' rock bridge and filled hole from 185' back to zero with ready mix cement. 6' below ground level. 8 5/8" surface pipe 6' below ground level.

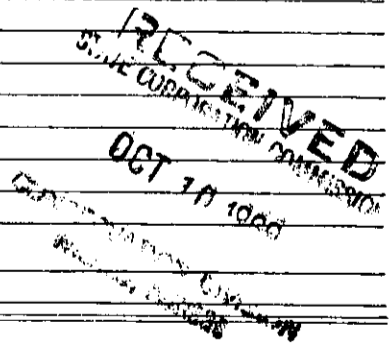

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Bert Self Casing Pulling Company  
Address R. R. # 4 Hutchinson, Kansas

STATE OF \_\_\_\_\_, COUNTY OF \_\_\_\_\_, ss.

\_\_\_\_\_ (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bert Self  
(Address)

SUBSCRIBED AND SWORN TO before me this \_\_\_\_\_ day of \_\_\_\_\_, 19 \_\_\_\_\_

My commission expires Oct. 18, 1969 \_\_\_\_\_ Notary Public.

ROTARY DRILLER'S LOG

15469-00545-0000

E. K. Carey Drilling Co., Inc., - Operator  
 Box 620  
 McPherson, Kansas

Elevations: 1294 K. B.

8-5/8" x 5 1/2" Head 6.40'  
 Below K. B.

Anderson #3

Casing Record:

N/2 of SE of NE  
 Sec. 32-16-1W  
 Saline County, Kansas

8-5/8" @ 136' w/85 sx.  
 Pozmix cement & 100# C.C.  
 5-1/2" @ 2602.5' w/75 sx.  
 Ash Grove Cement. Cemented  
 4 1/2' off bottom.

Well Commenced: 7-23-53  
 Well Completed: 7-31-53

Contractor: E. K. Carey Contractor, Rig #2, Box 620, McPherson, Kansas  
 Geologist: Don Hollar, E. K. Carey Drlg. Co., 815 Central Bldg. Wichita

Figures Indicate Bottom of Formation K. B.

Surface clay	25
Shale	50
Shale & lime	136
Anhydrite	205
Lime	600
Lime & shale	1050
Shale & lime	1795
Lime & shale	1976
Shale	2028
Lime	2320
Lime & shale	2398
Shale & lime	2475
Shale & shells	2601
Lime (Miss.)	2607 TD

Geologist Tops:

Lansing	2028
Miss.	2601 (-1307)

Rotary Total Depth 2607

5 1/2" casing set 2602.5' or  
 4 1/2 feet off bottom.

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 FEB 15 1962  
 CONSERVATION DIVISION  
 Wichita, Kansas

This is to certify that the above information is to the best of my knowledge true and correct.

SUBSCRIBED AND SWORN to before me this 1st day of August, 1953

E. K. CAREY CONTRACTOR

BY Herbert Rhoton  
 Herbert Rhoton, Superintendent

Don Hollar NP

My Commission Expires: November 13, 1956.