


15-169-00694-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Saline County. Sec. 32 Twp. 16S Rge. (X) 1 (W)

NORTH

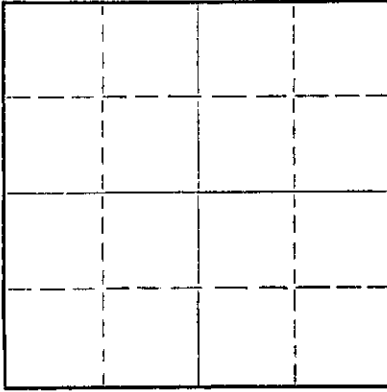

Locate well correctly on above Section Plat

Location as "NE/CNW/SE/SW" or footage from lines C SE SW SW
Lease Owner Lee Phillips Oil Co. and John C. Graves
Lease Name Mayer Well No. 1
Office Address 412 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 19, 1964
Application for plugging filed September 19, 1964
Application for plugging approved September 19, 1964
Plugging commenced September 19, 1964
Plugging completed September 19, 1964
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman, Box 180, Holyrood, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2685 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUL IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded up with heavy mud to 195 feet. Followed by wooden plug and 1/4 sack hulls. Placed 20 sacks cement onto hulls. Mudded up with heavy mud to 40 feet followed by wooden plug, 1/4 sack hulls and 10 sacks cement to base of well cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

SEP 28 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Graves Drilling Co., Inc.
Address 412 Union Center, Wichita, Kansas

STATE OF KANSAS, COUNTY OF BUTLER, ss.
John C. Graves (employee of owner) or (operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
412 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of September, 1964

My commission expires April 30, 1967 Betty Brandt Notary Public.

ROTARY DRILLERS' LOG

OPERATOR: Lee Phillips Oil Co. and John C. Graves
412 Union Center
Wichita, Kansas
DRILLING COMMENCED: September 12, 1964

CONTRACTOR: Graves Drilling Co., Inc.
412 Union Center
Wichita, Kansas
DRILLING COMPLETED: September 17, 1964

CASING RECORD: 5 Jts. 202' 8-5/8"
cemented with 185 sacks
LOCATION: Mayer No. 1
C SE SW SW
Section 32-16S-1W
Saline County, Kansas

0 - 145	Shale & lime streaks
145 - 205	Lime
205 - 925	Lime & shale
925 - 1615	Shale & lime
1615 - 1850	Lime
1850 - 2046	Shale & lime
2046 - 2310	Lime
2310 - 2659	Lime & shale
2659 - 2685	Lime
2685	Rotary Total Depth.

RECEIVED
STATE CORPORATION COMMISSION

SEP 28 1964

CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By John C. Graves
President

STATE OF KANSAS)
) SS
BUTLER COUNTY)

Subscribed and sworn to before me, a Notary Public, this 24th day of September, 1964.

My commission expires:

April 30, 1967

Betty Brandt
Betty Brandt Notary Public