


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Saline County. Sec. 1 Twp 16 Rge. 4 (E) (W)

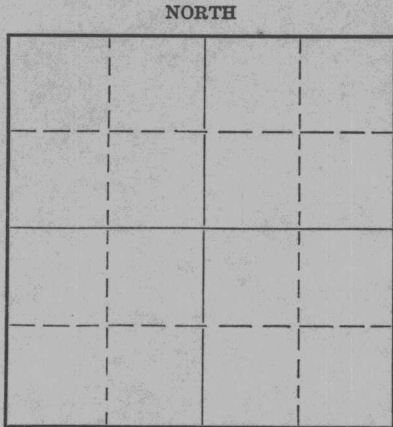

Locate well correctly on above Section Plat

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
Lease Owner Messrs. T. A. Phillips and J. L. Sanderson
Lease Name Ryding Well No. 1
Office Address Salina, Kansas (535 State)
Character of Well (completed as Oil, Gas or Dry Hole) Not completed
Date well completed 19 51
Application for plugging filed March 15 19 51
Application for plugging approved March 15 19 51
Plugging commenced March 16 19 51
Plugging completed March 16 19 51
Reason for abandonment of well or producing formation Lost circulation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Ruel E. Durkee
Producing formation Depth to top Bottom Total Depth of Well 1840 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	336.85'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with heavy mud to 334'.
Ran 120 sacks cement through drill pipe by Halliburton Cement truck.
40 sacks cement in side 8-5/8" casing from 190' to 334'. 80 sacks cement in formation. Set top plug at 30'.
15 sacks cement.

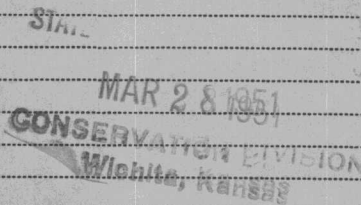

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Sterling Drilling Company
Address Sterling, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.
Rollin Mead (employee of owner) or (owner or operator)

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Rollin Mead
Sterling, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 24th day of March, 1951

My commission expires *[Signature]* Notary Public.

My Commission Expires Sept. 17, 1953 23-3273-s 4-50-10M

PLUGGING
FILE SEC 1 T 16 R 4
BOOK PAGE 68 LINE 4

STERLING DRILLING CO.

STERLING, KANSAS

WELL LOG ----- RYDING #1

Location - NW/4 NW/4 NW/4 of Section 1-16-4, Saline County, Kansas

Owner - Messrs. T. A. Phillips and J. L. Sanderson
Rotary Drilling Contractor - Sterling Drilling Company

Commenced - 3-9-51
Completed - 3-16-51 (w/r)

Total Depth - 1840' (w/r)

LOG

0- 245	Clay and Shale
245- 322	Shale
322- 375	Anhydrite
375- 425	Shale and Shells
425- 560	Lime and Shale
560- 775	Lime
775-1110	Shale and Lime
1110-1300	Shale and Shells
1300-1840	Shale and Lime

CASING RECORD

336.85' of 8-5/8" Surface Pipe
Cemented at 334' with 225 Sacks Cement

Recemented 168' Surface Pipe
with 95 Sacks Cement -
(2 Chloride, 2 Sacks Flocele -
6:00 p.m., 3-10-51)

PRODUCTION: Plugged and Abandoned.

RECEIVED
COMMISSION
APR 26 1951
REGISTRATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 1 T 16 R 4
BOOK PAGE 68 LINE 4