

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Saline County, Sec. 2 Twp. 16 Rge. 4 (E) W; (W)

Location as "NE/CNW/SW" or footage from lines NE NE SW

Lease Owner Ray Perera

Lease Name Kelly Well No. 3

Office Address McPherson, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 5-9-64 19

Plugging completed 5-14-64 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

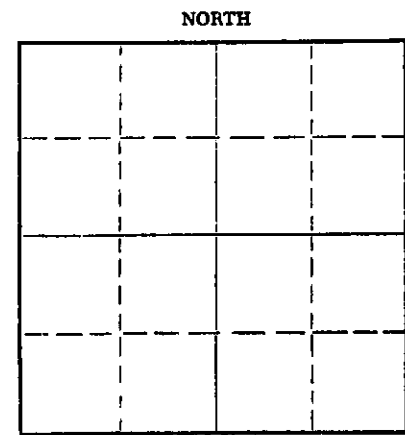

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3455 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUL IN	PULLED OUT
				8-5/8"	423'	None
				5-1/2"	3453'	2897'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3455', sanded hole to 3440' and dumped 5 sacks of cement @ 3440' with dump bailer. Pulled 5 1/2" casing, mudded hole to 200', set rock bridge to 190' and dumped 20 sacks of cement @ 190'. Mudded hole to 140', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

JUN 19 1964

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS;

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (producer) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of May, 1964

My commission expires May 20, 1968

Milton J. Holm
Notary Public.

W E L L R E C O R D

15-169-00947-0000

LEASE NAME Kelly WELL NO. 3 ELEVATION _____
 LEASE OWNER McPherson Operating Company
 LOCATION OF WELL NE/4 NE/4 SW/4 Section 2-16S-4W, McPherson County, Kansas *SALINE*
 WORK COMMENCED March 17, 1955 DRILLING COMMENCED March 17, 1955
 DRILLING COMPLETED March 30, 1955
 DRILLING CONTRACTOR J. A. Melland, 1111 No. Main St., Hutchinson, Kansas
 ROTARY DRILLING FROM 0' TO 3455'

FORMATION	FROM	TO	REMARKS
Surface clay, sand	0	60	
Shale & shells	60	255	
Shale	255	295	
Shale & shells	295	395	
Lime	395	423	Set and cemented 8-5/8" OD, 24# casing at 423' with 400 sacks of cement, 50# of Flo-cel and 3 sacks of calcium chloride. Cemented and circulated.
Lime & shale	423	450	
Shale & shells	450	605	
Shale & lime	605	790	
Lime & shale	790	920	
Shale & shells	920	1145	
Lime & shale	1145	1195	
Shale & shells	1195	1460	
Shale & shells	1460	1710	
Shale & lime	1710	1885	
Lime & shale	1885	2040	
Shale & lime-	2040	2055	
Lime	2055	2130	
Shale & lime	2130	2180	
Lime & shale	2180	2310	
Lime	2310	2335	
Lime & shale	2335	2605	
Lime	2605	2640	
Lime & shale	2640	2945	
Shale & lime	2945	3015	
Lime & shale	3015	3120	
Shale & lime	3120	3165	
Lime	3165	3195	
Lime & shale	3195	3275	
Shale	3275	3410	Circulated for samples @ 3448' 1 hr. 13m.
Shale & lime	3410	3455	Circulated for samples @ 3445' - 1 hr. 17 min. Circulated for samples @ 3455' - 1 hr. 10 min.
TOTAL DEPTH		3455	Set and cemented 5 1/2" OD casing at 3453' with 50 sacks of cement. Slope tests were taken at regular intervals and no deflections from the vertical were recorded.

Corrected back to ground measurement with Cable Tools to 3450'

Lime 3450 to 3460 Oil & water 3450 to 3460

RECEIVED
STATE CORPORATION COMMISSION

MAY 12 1964

CONSERVATION DIVISION
Wichita, Kansas