


15169-00711-0000

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CONSERVATION COMMISSION
Office of Conservation - Completely
Statewide - 1934
Headquarters - Topeka, Kansas
Conservation Commission
Topeka, Kansas

FORMATION PLUGGING RECORD

State set upper line
when reporting plug-
ging of formations.

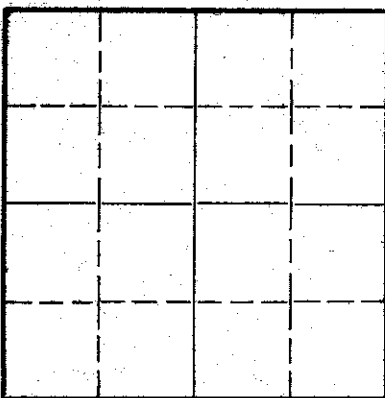

Saline County. Sec 16 Twp. 16 Rge. 1 W (E) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE NE NW
Lease Owner The Phil-Han Oil Company
Lease Name Redman Well No. 1
Office Address Union National Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed October 6, 1943 19
Application for plugging filed " 19
Application for plugging approved " 19
Plugging commenced " 19
Plugging completed " 19
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Durkee, McPherson, Kansas
Producing formation Depth to top Bottom Total Depth of Well 2024 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				5/8"	146' 8"	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Drove bottom plug to 140' and cemented with 10 sacks - filled with mud and drove top plug down to 20' and cemented with 5 sacks.

PLUGGING
FILE SEC 16 T 16 R 1 W
BOOK PAGE 93 LINE 22

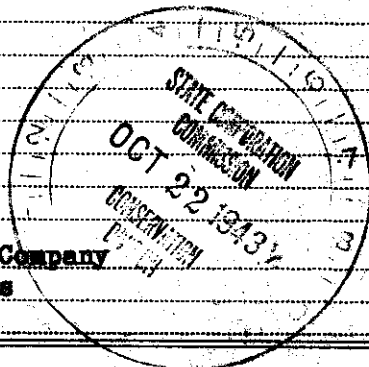

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to The Phil-Han Oil Company
Address Union National Bank Bldg., Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Perry R. Hanson (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) Perry R. Hanson

Subscribed AND Sworn to before me this 21st day of October 1943
Helen A. Stenberg
Notary Public.

My commission expires October 4, 1945.

15-169-00711-0000

The Phil-Han Oil Co.
#1 Redman

Sec. 16-16-1W
Saline County, Kansas
NE $\frac{1}{4}$ NE $\frac{1}{4}$ NW $\frac{1}{4}$

Comm: 9-29-43
Comp: 10-6-43

Production - Dry

Clay	40
Shale, Sand & Shell	142
Shale & Shells	255
Shale & Shells	370
Shale & Shells	420
Sand & Shale	530
Shale & Shells	640
Sand, Shale and Shells	825
Sand & Shale	995
Shale	1185
Shale & Shells	1300
Shale	1515
Lime	1610
Shale & Lime	1695
Lime & Shale	1770
Lime & Shale	1855
Shale & Shells	1950
Shale & Lime	2015
Shale & Lime	2024
T.D.	2024

CASING RECORD

146' 9" of 8 5/8" cemented
with 60 sax cement

16 16 LW
93 22

