

STATE OF KANSAS
STATE CORPORATION COMMISSION
130 S. Market, Room 2078
Wichita, KS 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-101-21472-6000

LEASE NAME Jewitt

WELL NUMBER 1-D

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

4290 Ft. from S Section Line

4290 Ft. from E Section Line

SEC. 26 TWP. 19 RGE. 29 (E) or (W)

COUNTY Lane

LEASE OPERATOR Wilton Petroleum, Inc.

ADDRESS 901 King Avenue, Nyssa, OR. 9713

PHONE (503) 372-3188 OPERATORS LICENSE NO. 7775

Date Well Completed 3-15-89

Character of Well oil

Plugging Commenced 1-27-99

(Oil) Gas, D&A, SWD, Input, Water Supply Well

Plugging Completed 1-28-99

The plugging proposal was approved on 1-27-99 (date)

by Michael Maier (KCC District Agent's Name).

Is ACO-1 filed? yes If not, is well log attached? no

Producing Formation none Depth to Top Packer & perfs cemented off Bottom T.D. 4514

PBTO 3800

Show depth and thickness of all water, oil and gas formations.

(Oil) GAS OR WATER RECORDS | CASING RECORD no (csg) pipes pulled

Formation	Content	From	To	Size	Put In	Pulled out
						<u>none</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plug were used, state the character of same and depth placed, from feet to 3 feet each set.
Pressured csg to 500 PSI, Holding pressure. Perforate well with two holes at 1350 ft. Cement with 150 sks 60/140 oz mix w/ 6% gel Pressure at 200 PSI when shut in. Pumped 10 sks down braden head & pressured to 300 PSI Total 160 sks down 43 csg w/ holes shot a 1350 ft

Name of Plugging Contractor Swift Services, Inc License No. 32382

Address P.O. Box 466, Ness City, Ks. 67560

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Wilton C. Jackson/President/Wilton Petroleum

STATE OF Kansas COUNTY OF Lane, ss.

Ted J. Fuchs (Employee of Operator) or (Operator) of

above-described well, being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained and the log of the above-described well as filed the the same are true and correct, so help me God.

(Signature) Ted J. Fuchs

(Address) P.O. Box 466, Ness City, Ks

SUBSCRIBED AND SWORN TO before me this 15th day of February, 19 99



Pat Gabel Notary Public

My Commission Expires: Nov. 29, 2000

Please return: *(initials)*

L-K Wireline, Inc.


Gamma Ray Correlation

Filing No.	Company	CHIEF DRILLING COMPANY, INC.	
	Well	JEWETT #1-D 15-101-21472	
	Field	WILDCAT	
	County	LANE	State
Location:		SE-NW-NW	Other Services
SEC 26 TWP 19S RGE 29W			JET PERF

PERMANENT DATUM	GROUND LEVEL	ELEV. 2834	K.B. 2839
LOG MEASURED FROM	KELLY BUSHING	5 FT. ABOVE PERM. DATUM	D.F. 2836
DRILLING MEASURED FROM	KELLY BUSHING		G.L. 2834

DATE	6-21-88	6-21-88
RUN NO.	ONE	TWO
TYPE LOG	GAMMA RAY - CORRELATION	CEMENT TOP
DEPTH-DRILLER	4499	4499
DEPTH-LOGGER	4491 1/2	4491 1/2
BOTTOM LOGGED INTERVAL	4490 1/2	4490 1/2
TOP LOGGED INTERVAL	3700	3400
TYPE FLUID IN HOLE	WATER	
SALINITY, PPM CL	FRESH	TOP OF CLEAN
DENSITY		CEMENT @3585
LEVEL	FULL	
MAX. REC. TEMP. DEG. F.		TOP OF
OPERATING RIG TIME	1 1/2 HOURS	CONTAMINATE
RECORDED BY	ALAN KARLIN	CEMENT @3437
WITNESSED BY	MR. GARY "DOG" LINDENMUTH	
TRUCK #	307	

RUN NO.	BORE-HOLE RECORD				CASING RECORD			
	BIT	FROM	TO	SIZE	WGT.	FROM	TO	
ONE	12 1/2	000	291	8 5/8		000	291	
TWO	7 7/8	291	4690	4 1/2		000	4511	

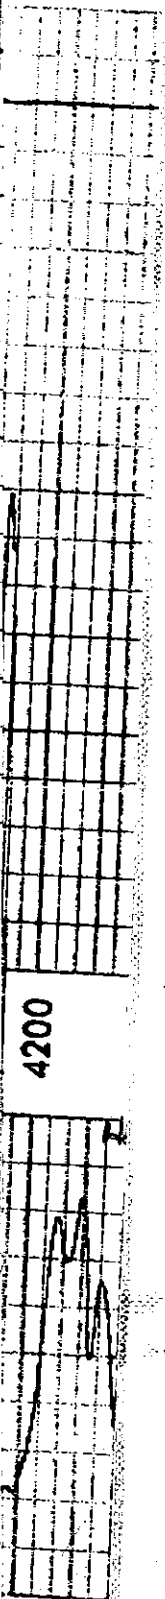

543