


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Ness County, Sec. 33 Twp. 17S Rge. 23W E/W  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines  
C SW NW

Lease Owner Icer Addis  
Lease Name Baer Well No. #1  
Office Address P. O. Box 8038, Wichita, Kansas 67208  
Character of Well (Completed as Oil, Gas or Dry Hole)

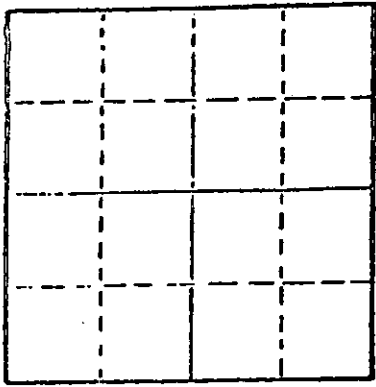

Locate well correctly on above  
Section Plot

dry hole  
Date Well completed February 26, 1978 19  
Application for plugging filed February 25, 1978 19  
Application for plugging approved February 25, 1978 19  
Plugging commenced February 25, 1978 19  
Plugging completed February 25, 1978 19  
Reason for abandonment of well or producing formation  
dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set. Hole Plugged as follows with 50-50 pozmix, 6% gel: 70 sacks @ 720', 20 sacks @ 240', 10 sacks @ 40'. Plug down 6:30 p.m., February 25, 1978.

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 21 1978  
STATE CORPORATION COMMISSION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor \_\_\_\_\_


STATE OF KANSAS COUNTY OF BARTON, ss.  
Kenneth J. Link (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kenneth J. Link President  
P. O. Box 355, Great Bend, Kansas 67530  
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of March, 1978.

Loneita Barry  
Loneita Barry Notary Public.

My commission expires 3-28-80.



15-135-21429-6000

D R I L L E R S   L O G

#1 Baer

CASING RECORD:  
294.75' used 28#  
8-5/8" surface  
casing.

COMPANY: Icer Addis  
CONTRACTOR: Strata Drilling Company  
COMMENCED: February 18, 1978  
COMPLETED: February 26, 1978

DESCRIPTION: C SW NW  
Section 33-17S-23W  
Ness County, Kansas

TOTAL ROTARY  
DEPTH: 4384'

D & A

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post rock and shale	0	312	Ran 7 jts. used 28# 8-5/8" surface casing; set and cemented @ 300' with 180 sacks common cement, 2% gel, 3% C.C.; cement circulated. Plug down at 2:00 a.m., February 19, 1978.
Shale, red bed	312	885	
Shale	885	1626	
Anhydrite	1626	1661	
Shale	1661	2302	
Lime and shale	2302	4384	Ran one electric log.

Ran two drill stem tests.

Hole plugged with 50-50 pozmix, 6% gel as follows: 70 sacks @ 720', 20 sacks @ 240', 10 sacks @ 40'. Plug down at 6:30 p.m., February 25, 1978.

RECEIVED  
STATE CORPORATION COMMISSION

MAR 21 1978

NOTARY PUBLIC  
Ness County, Kansas

STATE OF KANSAS )  
                          ) ss  
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

*Kenneth J. Link*  
Kenneth J. Link, President

Sworn to and subscribed before me this 17th day of March, 1978.

My commission expires 3-28-80.

*Loneita Barry*  
Loneita Barry, Notary Public

