


STATE OF KANSAS
STATE CORPORATION COMMISSIONS
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

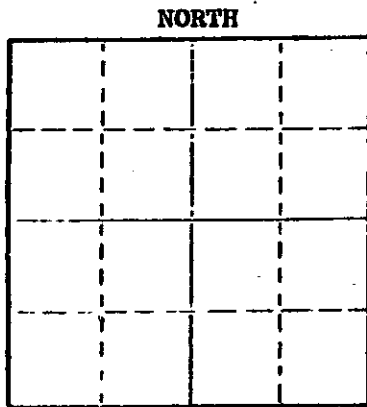

Locate well correctly on above Section Plat

Ness County, Sec. 33 Twp. 17S Rge. (E) 23 (W)
Location as "NE/CNW/SW" or footage from lines C SE NW
Lease Owner O. A. Sutton
Lease Name Egos Well No. 1
Office Address 800 Sutton Place, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 11 1976
Application for plugging filed January 11 1976
Application for plugging approved January 11 1976
Plugging commenced January 11 1976
Plugging completed January 11 1976
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 4395 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	404'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug #1 at 600' with 50 sacks; plug #2 at 300' with 25 sacks; plug & bridge at 40' with 10 sacks. Job complete at 12:00 a.m. 1-11-76

RECEIVED
STATE CORPORATION COMMISSION

FEB 2 1976

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Gabbert-Jones, Inc. CONSERVATION DIVISION
Address 830 Sutton Place, Wichita, Kansas 67202 Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK ss.
Jack G. Paulsen (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack G. Paulsen
Jack G. Paulsen
800 Sutton Place, Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 28th day of January 1976

My commission expires June 28, 1978.

Jean S. Taylor
Jean S. Taylor Notary Public.

15-135-21069-0000

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Foos #1
SE-NW Sec 33-17S-23W
Ness County Kansas

Commenced: 12-29-75

Completed: 1-11-76

OPERATOR:

Depth		Formation	Remarks
From	To		
0	50	Surface Clay-Post Rock	
50	165	Shale	Ran 10 jts of Used 28#
165	250	Shale-Sand	8 5/8" csg set @ 404' Cemented
250	410	Shale-Shells	w/275 sks Common 3% CC
410	530	Shale-Redbed	PD @ 8:30 p.m. 12-29-75
530	605	Sand-Shale	
605	975	Shale	
975	1070	Shale-Shells	
1070	1290	Sand	
1290	1628	Shale-Shells-Sand	
1628	1660	Anhy	
1660	1665	Shale-Shells	
1665	2185	Shells-Shale	
2185	2415	Shale-Lime	
2415	2790	Lime-Shale	
2790	2985	Lime	
2985	3140	Lime-Shale	
3140	3340	Shale-Lime	
3340	4395	Lime	
	4395 - TD		DRY & ABANDONED

RECEIVED
STATE CONSERVATION COMMISSION

FEB 2 1976

CONSERVATION DIVISION
Wichita, Kansas

I, James S. Sutton II, certify this is a correct copy of the DRillers' Log for the well drilled SE-NW Sec 33-17S-23W, Ness County Kansas to the best of my knowledge and belief.

James S. Sutton II
JAMES S. SUTTON II

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 28th day of January, 1976, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day year last above written.

ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commixxon Expires: February 6, 1979.