

STATE OF KANSAS
STATE CORPORATION COMMISSION

15-135-21444-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ness County, Sec. 33 Twp. 17S Rge. 23W E/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
C NE NE


Lease Owner Strata Drilling Company
Lease Name Foos Well No. #1
Office Address P. O. Box 355, Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole)
dry hole

Date Well completed April 9, 1978 19
Application for plugging filed April 9, 1978 19
Application for plugging approved April 9, 1978 19
Plugging commenced April 9, 1978 19
Plugging completed April 9, 1978 19
Reason for abandonment of well or producing formation
dry hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 4380'
Show depth and thickness of all water, oil and gas formations.



Locate well correctly on above
Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set. Hole plugged with 50-50 pozmix, 6% gel, as follows:
70 sacks @ 600', 20 sacks @ 240', 10 sacks @ 40'. Plug down @ 8:00 a.m., April 9, 1978.

RECEIVED
STATE CORPORATION COMMISSION

MAY 19 1978

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Strata Drilling Company


STATE OF KANSAS COUNTY OF BARTON, ss.
Kenneth J. Link (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kenneth J. Link President
P. O. Box 355, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of April, 1978.

Loneita Barry
Loneita Barry Notary Public.

My commission expires 3-28-80.

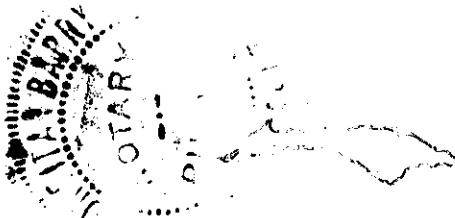

15-135-21444-0000

DRILLERS LOG

#1 Foos

CASING RECORD: 7 jts. used 8-5/8" surface casing	COMPANY: Strata Drilling Company	DESCRIPTION: C NE NE Section 33-17S-23W Ness County, Kansas
TOTAL ROTARY DEPTH: 4380'	CONTRACTOR: Strata Drilling Company	ELEVATION: 2346' KB
	COMMENCED: April 3, 1978	
	COMPLETED: April 9, 1978	

D & A

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post rock and sand	0	300	Ran 284' used 8-5/8" surface casing; set and cemented @ 289' with 180 sx. common cement, 2% gel, 3% C.C.; cement circulated. Plug down 8:30 p.m., April 3, 1978.
Sand and shale	300	1626	
Anhydrite	1626	1665	
Shale and Lime Streaks	1665	2280	
Lime and shale	2280	4370	
Lime	4370	4380	Ran 2 drill stem tests.
			Hole plugged with 50-50 pozmix, 6% gel as follows: 70 sacks @ 600', 20 sacks @ 240', 10 sacks @ 40'. Plug down @ 8:00 a.m., April 9, 1978.

RECEIVED
STATE CORPORATION COMMISSION

MAY 19 1978

STATE OF KANSAS)
) ss
COUNTY OF BARTON)

CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

Kenneth J. Link
Kenneth J. Link, President

Sworn to and subscribed before me this 18th day of April, 1978.

My commission expires: 3-28-80.

Loneita Barry
Loneita Barry, Notary Public

