

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-193-20893-00-00
Spot: SESWNWNW Sec/Twnshp/Rge: 33-10S-34W
1132 feet from N Section Line, 517 feet from W Section Line
Lease Name: EPARD Well #: 2-33
County: THOMAS Total Vertical Depth: 4860 feet

Operator License No.: 31652
Op Name: NORSTAR PETROLEUM, INC.
Address: 88 INVERNESS CIR E. UNIT F104
ENGLEWOOD, CO 80112

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	267		185 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 06/27/2013 12:00 AM
Plug Co. License No.: 33575 Plug Co. Name: WW DRILLING, LLC
Proposal Rcvd. from: MARK Company: WW DRILLING, LLC Phone: (785) 743-6774

Proposed Plugging Method: Ordered 205 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: MARVIN MILLS Witness Type: NONE
Date/Time Plugging Completed: 06/27/2013 5:00 AM KCC Agent: MARVIN MILLS

Actual Plugging Report:

1st plug @2780 w/25 sx
2nd plug @1762 w/100 sx
3rd plug @320 w/40 sx
4th plug @40 w/10 sx

Rathole 30 sx Mousehole 15 sx

Perfs:

Remarks: CONSOLIDATED

Plugged through: DP

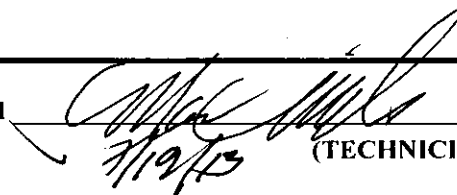
KCC WICHITA

JUL 08 2013

RECEIVED

District: 04

Signed


7/19/13 (TECHNICIAN)

CM

JUN 27 2013