

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-101-21117-00-01  
Spot: CSESW Sec/Twnshp/Rge: 15-20S-27W  
660 feet from S Section Line, 3300 feet from E Section Line  
Lease/Unit Name: THOMAS BROWN Well Number: 1  
County: LANE Total Vertical Depth: 4570 feet

Operator License No.: 31627  
Op Name: WHITETAIL CRUDE, INC  
Address: N HWY 283 PO BOX 544  
NESS CITY, KS 67560

Production Casing Size: 4.5 feet: 4568 \$/48.53  
Surface Casing Size: 8.625 feet: 1021 WITH 550 SX CMT

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 02/17/2003 9:40 AM  
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.  
Proposal Rcvd. from: MIKE J. FRITZLER Company: WHITETAIL CRUDE Phone: (785) 798-3641

Proposed Plugging Method: SAND OFF BOTTOM & CAP SAND PLUG W/2 SX CMT VIA DUMP BAILER. RUN TUBING TO 1200' AND SPOT 50 SX CMT 3% CC. PERFORATE @ 500'. CIRCULATE CEMENT TO SURFACE.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 02/17/2003 1:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:


PBTD 4486'. PERFS AT 4474-79'. CEMENTED AT 2100' WITH 200 SX CMT & 1650' WITH 230 SX CMT. SANDED TO 4100' & 4 SX CMT. SPOT 50 SX COMMON CMT WITH 3% CC AT 1200'. CMT FILLED ABOUT 620' OF CASING. CUT PIPE AT 500'. DID NOT COME LOOSE & COULD NOT PUMP INTO. SHOT AT 300' & CAME LOOSE. PULLED CASING AND RAN TUBING TO 500'. PUMP 70 SX CMT. CMT CIRCULATED. PULLED TUBING AND TOPPED OFF WITH 10 SX CMT.

RECEIVED  
FEB 27 2003  
2-27-03  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES. RECOVERED 300' OF 4 1/2" CASING.

Plugged through: TBG

District: 01

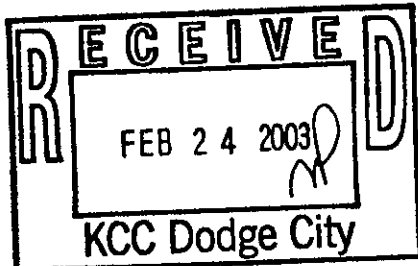

Signed

Michael J. Maier  
(TECHNICIAN)

INVOICED  
DATE 2-27-03  
VV. NO. 2003061236

Fokhr OP 2/28  
[Signature]