

CARD MUST BE TYPED

State of Kansas
NOTICE OF INTENTION TO DRILL
(see rules on reverse side)

CARD MUST BE SIGNED

Starting Date: June 1, 1985
month day year

API Number 15- 101-21177-0000

OPERATOR: License # 5249
Name Osborn Heirs Company
Address P.O. Box 17968
City/State/Zip San Antonio, Texas 78286
Contact Person John W. Stewart
Phone (512) 826-0700

SE, SW, SE Sec 31 Twp 18 S, Rge 30. East West
(location)
330 Ft North from Southeast Corner of Section
1650 Ft West from Southeast Corner of Section
(Note: Locate well on Section Plat on reverse side)

CONTRACTOR: License # 5420
Name White & Ellis Drilling, Inc.
City/State 401 E. Douglas, Wichita, KS 67202

Nearest lease or unit boundary line 330 feet.
County Lane
Lease Name Delmar Whiting Well# I

Well Drilled For: Well Class: Type Equipment:
 Oil Swd Infield Mud Rotary
 Gas Inj Pool Ext. Air Rotary
 OWWO Expl Wildcat Cable

Domestic well within 330 feet: yes no
Municipal well within one mile: yes no

If OWWO: old well info as follows:
Operator N/A
Well Name N/A
Comp Date N/A Old Total Depth N/A
Projected Total Depth 4650 feet
Projected Formation at TD Mississippi
Expected Producing Formations Mississippi

Depth to Bottom of fresh water 180 feet
Lowest usable water formation Dakota Zone
Depth to Bottom of usable water 1200 feet
Surface pipe by Alternate: 1 2
Surface pipe to be set 200 feet
Conductor pipe if any required none required feet
Ground surface elevation 2899 feet MSL
This Authorization Expires 11-30-85
Approved By S-30-85 [Signature]

I certify that we will comply with K.S.A. 55-101, et seq., plus eventually plugging hole to K.C.C. specifications. *The production string will be cemented on bottom & from 1250' back to the surface to protect the fresh waters in Dakota formation.
Date May 15, 1985 Signature of Operator or Agent [Signature] Title Chief Engineer

REH SORKOHE

Must be filed with the K.C.C. five (5) days prior to commencing well
This card void if filing not started within six (6) months of date received by K.C.C.

RECEIVED
STATE CORPORATION COMMISSION

RECEIVED
STATE CORPORATION COMMISSION

MAY 30 1985

5-30-85


CONSERVATION DIVISION
Wichita, Kansas

A Regular Section of Land
1 Mile = 5,280 Ft.

Important procedures to follow:

MAY 20 1985
5-20-85
CONSERVATION DIVISION
Wichita, Kansas

1. Notify District office before setting surface casing.
2. Set surface casing by circulating cement to the top.
3. File completion forms ACO-1 with K.C.C. within 90 days of well completion, following instructions on ACO-1, side 1, and including copies of wireline logs.
4. Notify District office 48 hours prior to old well workover or re-entry.
5. Prior to plugging, prepare a plugging plan, then obtain agreement from the appropriate district office for an approved plugging plan.
6. Submit plugging report (CP-4) to K.C.C. after plugging is completed.
7. Obtain an approved injection docket number before disposing of salt water.
8. Notify K.C.C. within 10 days when injection commences or terminates.
9. If an alternate 2 completion, cement in the production pipe from below any usable water to surface within 120 days of spud date.

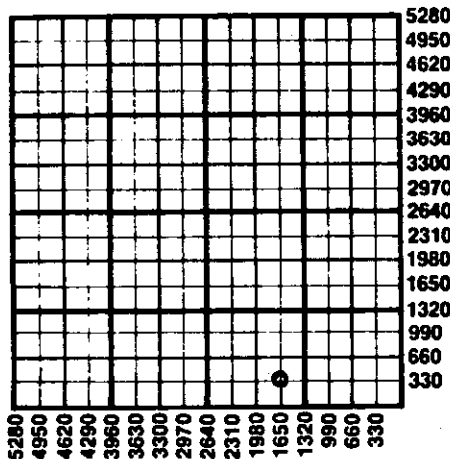

State Corporation Commission of Kansas
Conservation Division
200 Colorado Derby Building
Wichita, Kansas 67202
(316) 263-3238