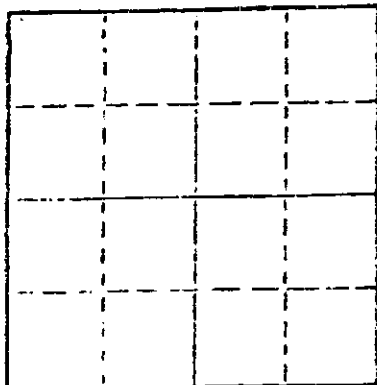


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Locate well correctly on above
Section Plot

Ness County, Sec. 4 Twp. 20 Rge. 26W
Location as "NE/CNW/SW" or footage from lines
C NW NE

Lease Owner PETX Petroleum Corp.
Lease Name Betz Well No. 1
Office Address 1616 Glenarm Place, 1700 Security Life Bldg.
Character of Well (Completed as Oil, Gas or Dry Hole)

Dry Hole

Date Well completed 3/14/81 19
Application for plugging filed 3/14/81 19
Application for plugging approved 3/14/81 19
Plugging commenced 3/14/81 19
Plugging completed 3/14/81 7 p.m. 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations. RTD 4740'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	531	8-5/8"	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug @ 1220' with 65 sx

2nd plug @ 540' with 30 sx

Bridge @ 40' with 10 sacks

5 sacks in rathole

Job complete @ 7 p.m. 3/14/81

RECEIVED

APR 10 1981

10-10-1981

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Slawson Drilling Company, Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.
James C. Remsberg, Slawson Drilling Co., Inc. (employee of owner) or (owner or operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

James C. Remsberg

200 Douglas Building, Wichita 67202

(Address)


SUBSCRIBED AND SWORN TO before me this 7th day of April, 1981

Mary Lou Taylor

Mary Lou Taylor

Notary Public.

My Commission expires January 17, 1985



15-135-21982-00-00

DRILLERS LOG

OPERATOR: PETX Petroleum Corp.
1616 Glenarm Place
1700 Security Life Building
Denver, Colorado 80202

WELL NAME: #1 Betz
C NW NE Sec. 4-20S-26W
Ness County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
200 Douglas Building
Wichita, Kansas 67202

COMMENCED: 3/4/81

COMPLETED: 3/14/81

RTD: 4740'

SURFACE CASING: 8-5/8" set at 531' with 300 sx cement

0' to 110' Post rock, Lime & Shale
110' to 535' Sand & Shale
535' to 720' Shale
720' to 1284' Sand & Shale
1284' to 1297' Anhydrite
1297' to 1560' Sand & Shale
1560' to 1883' Sand, Shale & Shells
1883' to 1923' Anhydrite
1923' to 1990' Shale & Shells
1990' to 2655' Shale
2655' to 4115' Lime & Shale
4115' to 4280' Lime
4280' to 4740' Lime & Shale
RTD 4740'

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc.
hereby state the above is an accurate copy of the #1 Betz log for
PETX Petroleum Corporation.

James C. Remsberg
James C. Remsberg

Subscribed and sworn to me
this 7th day of April, 1981

Mary Lou Taylor
Mary Lou Taylor, Notary

My commission expires January 17, 1985

