


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Barber County, Sec. 31 Twp. 31 Rge. 11W E/W  
Location as "NE/CNW/SW" or footage from lines  
NE NE

Lease (w/les) Lario Oil & Gas  
Lease Name Swartz #1 Well No.  
Office Address Wichita, Kansas  
Character of Well (Completed as Oil, Gas or Dry Hole)

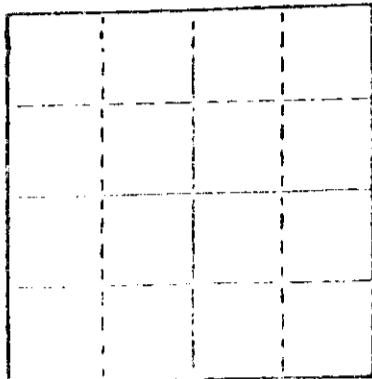

Date Well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 3/30/78 19  
Plugging completed 4/5/78 19  
Reason for abandonment of well or production formation depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Owens  
Producing formation Depth to top Bottom Total depth of Well 4310  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	BIT IN	PULLED OUT
				12 1/2"	105	none
				7"	4277	2237'
	4-10-78					

Describe in detail the manner in which the well was plugged, indicating where the sand fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded to 4250' and ran 6 sacks cement. Blasted cement from around 7". Rigged up and found pipe into at 2230', pulled 51 joints. Circulated 30 sacks gel thru 7" casing at 680', pulled 11 joints. Circulated common cement thru 7" casing at 345', pulled 10 joints. Circulated 50 sacks common cement thru 7" casing at 60', pulled 2 joints. Talled pipe. Checked hole, found top of cement 8' down, filled with cement to base of cellar.

PLUGGING COMPLETE.

(If additional description is necessary, use back of this sheet)

Name of Plugging Contractor KELSO CASING PULLING  
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
R. DARRELL KELSO (employed of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says that I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *R. Darrell Kelso*  
CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of April, 1978

*Margaret Melcher*  
Notary Public.

My commission expires

