


STATE OF KANSAS  
STATE CORPORATION COMMISSION

15-165-00089-00-01

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

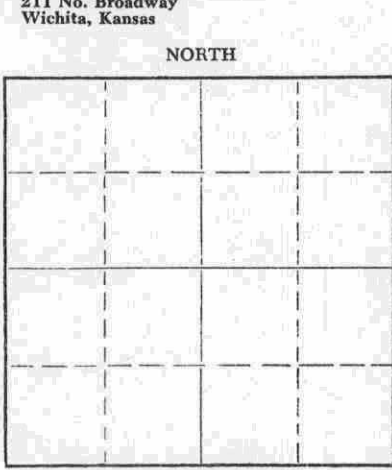

Locate well correctly on above Section Plat

Rush County. Sec. 11 Twp. 16S Rge. 17W (E) (W)  
Location as "NE/CNW/SW" or footage from lines NW NW NW  
Lease Owner Bennett & Roberts Oil Operations  
Lease Name Stegman "A" Well No. 1  
Office Address Drawer 633, Russell, Ks.  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 9/5 19 57  
Application for plugging filed 1/29 19 58  
Application for plugging approved 1/30 19 58  
Plugging commenced 2/12 19 58  
Plugging completed 2/17 19 58  
Reason for abandonment of well or producing formation Did not produce enough oil to to operate economically  
If a producing well is abandoned, date of last production Sept. 30 19 57  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3605 Feet  
Show depth and thickness of all water, oil and gas formations. 3390 PBTB

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1128'	None
				5 1/2"	3604 1/2'	2989.16'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Crushed rock to 3310', 4 sx cement. Mud to 450', rock bridge & 20 sx cmt. Mud to 200', rock bridge & 20 sx cement. Mud to 35, rock bridge & 10 sx cement.

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 5 1958  
CONSERVATION DIVISION  
Wichita, Kansas  
03-05-1958

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co., Inc.  
Address P. O. Box 364, Great Bend, Ks.

STATE OF KANSAS, COUNTY OF RUSSELL, ss.  
Harold Wurst (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Harold Wurst  
Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 26th day of February, 19 58

Clara Hummel  
Notary Public.

My commission expires 6/17/58

PLUGGING  
FILE SEC 11 T 16 R 17W  
BOOK PAGE 49 LINE 15

15-145-00089-00-01

DRILLING RECORD

Well: Stegman No. 1  
NW NW NW Sec. 11-16S-17W  
Rush County, Kansas

1128' 8-5/8" Surface Casing  
cemented w/500 sacks.

Work Commenced: 12- 1-56  
Drilling Commenced: 12- 1-56  
Drilling Completed: 12-13-56  
Work Completed: 12-14-56

WELL LOG

Surface clay	0	to	20
Rock	20	to	135
Shale	135	to	220
Shale, sand & shells	220	to	610
Shale & shells	610	to	640
Sand	640	to	767
Shale, red bed	767	to	960
Red bed	960	to	1118
Anhydrite	1118	to	1157
Red bed	1157	to	1225
Shale & shells	1225	to	1350
Shale	1350	to	1600
Shale, shells & salt	1600	to	1840
Shale & lime streaks	1840	to	1850
Lime & shale	1850	to	2195
Sandy lime & pyrite iron	2195	to	2240
Sandy lime & shale	2240	to	2300
Lime & shale	2300	to	2330
Shale & lime streaks	2330	to	2410
Lime & shale	2410	to	2540
Lime	2540	to	2595
Lime & shale	2595	to	3085
Lime	3085	to	3563
Arbuckle	3563	to	3594 T.D.

Well opened up by Bennett & Roberts Drilling Co. on August 26, 1958, drilled to 3605 total depth, completed 9/5/57. Set 5 1/2" Casing @ 3604 1/2', Plugged back to 3390'.

RECEIVED  
STATE CORPORATION COMMISSION

MAR 5 1958  
03-05-1958  
CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
FILE SEC 11 T 16 R 14a  
BOOK PAGE 79 LINE 15