


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

NORTH

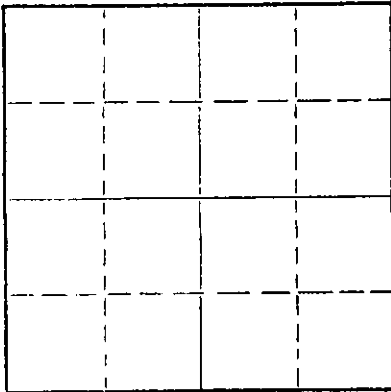

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well Ted Dewey

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2565 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	757'	-----

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Hole mudded to 225'  
1/2 sack Hulls, plug, and 23 sacks cement  
Mud to 40'  
1/2 sack Hulls, plug, and 10 sacks cement  
Rathole capped with 2 sacks cement

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 18 1971  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor White & Ellis Drilling, Inc.

Address Box 448, El Dorado, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.


Ernest Sifford (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well has been filed and that the same are true and correct. So help me God.

(Signature) Ernest Sifford

(Address)

SUBSCRIBED AND SWORN to before me this 15th day of October, 19 71



September 26, 1972

L. B. Auer  
L. B. Auer

Notary Public.

15-015-20462-0000 DR

CASING RECORD

8 5/8"

757' Cemented  
w/375 sacks

Location: NE-SW-NW NE-SW-NW  
Section: 30-25S-5E  
Butler County, Kansas  
Farm: Murray "A" #99  
Well Owner: Cities Service Oil Company  
Contractor: White & Ellis Drilling, Inc  
Commenced: 10-4-71  
Completed: 10-9-71

Total Depth

2565'

KELLY BUSHING MEASUREMENT 5' ABOVE GROUND LEVEL

FORMATION	DEPTH
Cellar	0-7
Lime & Shale	175
Lime	390
Shale & Lime	1375
Shale	1450
Lime	1475
Shale	1520
Sand	1570
Sandy Shale	1740
Shale	1763
Lime	1896
Shale	2043
Lime	2180
Shale	2430
Shale & Lime	2514
Lime	2565

DRY HOLE

PLUGGED & ABANDONED

TOPS

Lansing	1763
Kansas City	2043
Viola	2514

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 18 1971  
CONSERVATION DIVISION  
Wichita, Kansas