


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH



Locate well correctly on above
Section Flat

Barber County, Sec. 7 Twp. 31 Rgs. 14 (E) (W)
Location as "NE/CNW/KSW" or footage from lines NE SE SE
Lease Owner Raymond Oil Co., Inc.
Lease Name Oldfather #2 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 11/23/73 19
Plugging completed 11/27/73 19
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4598 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				15 1/2	116	none
				10-3/4	688	none
				5 1/2"	4598	2778'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked bottom, ran sand to ~~400~~ 4300' and dumped 5 sacks cement. Loaded hole, shot pipe at 2927', 2832', pulled 97 joints. Bailed hole to 370' and set 10' rock bridge, dumped 7 yards ready mix. Talled pipe.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
DEC 4 1973
12-4-73
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss.

NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

CHASE, KANSAS (Address)

Subscribed and Sworn to before me this 28th day of November 19 73

My commission expires



MARGARET TELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975


Notary Public

15-007-10159-0000
 WELL LOG BUREAU KANSAS GEOLOGICAL SOCIETY
 412 Union National Bk Bldg., Wichita, Kansas

Company - SINCLAIR PRAIRIE OIL CO.
 Farm Glenn Oldfather No. 2

SEC. 7 T. 31 R. 14 W
 NE SE SE
 990' F&L & 330' FEL SE 1/4

Total Depth. 4598' PB 4374'
 Comm. 5-28-46 Comp. 5-27-46
 Shot or Treated.
 Contractor. Harbor Drig. Co.
 Issued. 11-9-46

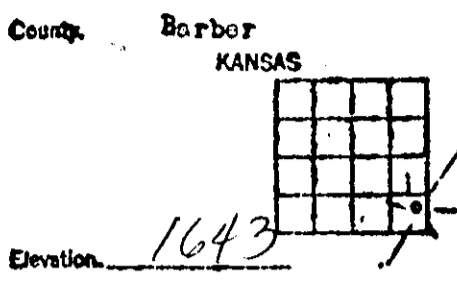

CASING:
 15 1/2" 116' Cem. w/100
 10 3/4" 688' Cem. w/250
 5" 4598' Cem. w/300

Production. 5,598,000 G.

Figures indicate Bottom of Formations.

sand	65	Plugged back to 4374' in Viola
red bed	133	Completed for a gas well
red rock	200	5,598,000 cu. ft. daily.
shale, sand & red rock	465	LW plug @ 4454'
shale & lime shells	575	12 holes 4438-44' show oil 4438-40'
sand & shells	608	12 holes 4438-40' acid 1000 gals.
lost circ. no ret.		35 holes 4430-36'
to 690'		36 holes 4436-40' acid 1000 gals.
shale	700	flowed 3 BOPH, some gas 3000
shale blue & red bed	900	gals. acid 4430-44'
shale & shells	1400	Flow wide open thru tbg. made
salt " shells	1545	1,600,000 cu. ft. gas.
shale " lime	1640	LW plug 4423-28' shot 59 holes
lime & anhydrite	1795	4394-4414'
lime	1915	LW plug 4374-78'
lime & shale	2110	24 holes 4333-42'
lime brkn	2185	94 holes 4342-58'
lime	2215	1,480,000 cu. ft. gas.
lime & shale	2315	2000 gal. acid. after
lime	2400	blowing 5 hrs. showed
lime & shale	2455	2,280,000 cu. ft. gas
lime & chert	2490	
lime	2600	
lime & shale	2615	
lime sft	2745	
lime & shale	2800	
shale & shells	2890	
lime & shale	3005	
shale	3014	
lime hrd wh	3060	
lime	3200	
shale & lime	3500	
lime sft	3565	
lime	3636	
lime sft	3695	
shale & lime	3755	
lime	4095	
lime & chert	4115	
lime	4150	
lime hrd gy	4170	
lime	4270	
lime & shale	4320	
shale & lime	4346	
lime	4364	
lime & chert	4433	
lime	4436	
cherty lime & shale	4460	
lime & sand	4485	
sand hrd & sft	4515	
sand-shale	4561	
shale & sand	4575	
Cored to	4598	
Total Depth. PB 4374'		

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 19 1946
 11-19-73
 CONSERVATION DIVISION
 Wichita, Kansas

Tops:	Rig floor meas.
Lansing K. C.	3738
Viola	4329
Simpson	4465
Arbuckle	4575