

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 7 Twp. 31S Rge. (E)14 (W)
Location as "NE/CNWxSWx" or footage from lines. C SE SW

Lease Owner Tilco, et al

Lease Name Shaft B-#1 Well No. B-#1

Office Address 815 Wichita Plaza, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 3-30 19 69

Application for plugging filed 3-30 19 69

Application for plugging approved 3-30 19 69


Plugging commenced 3-30 19 69

Plugging completed 3-30- 19 69

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

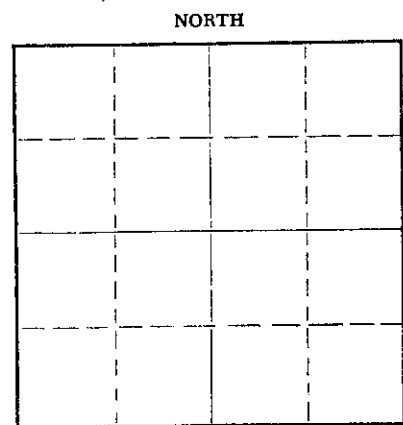

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well

Producing formation Depth to top Bottom Total Depth of Well 3910 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13"	196'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud to 195' set plug and 1 sack of hulls with 50 sax of cement. Filled hole to 40' set plug & 1 sack of hulls with 20 sax of cement. 3 sax in rat hole

RECEIVED
STATE CORPORATION COMMISSION
APR 7 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.

Address Box 486, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.

Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of March, 19 69

My commission expires April 1, 1971

Ulanda Nichols
Notary Public.

DRILLER'S LOG

COMPANY	Tilco, et al
CONTRACTOR	LEBEN DRILLING, INC.
FARM	SHAFT B-#1
LOCATION	C SE SW SECTION 7-31S-14W BARBER COUNTY, KANSAS
COMMENCED	3-22-69
COMPLETED	3-30-69

0	80	Sand, Gravel
80	200	Red Bed
200	1275	Shale
1275	1985	Lime, Shale
1985	2300	Lime
2300	2685	Lime, Shale
2685	3100	Shale, Lime
3100	3274	Lime
3274	3774	Lime, Shale
3774	3910	Lime
	3910	RTD - D. & A.

RECEIVED
STATE CORPORATION COMMISSION
4-7-69
APR 7 1969
CONSERVATION DIVISION
Wichita, Kansas

13" used surface casing set @ 196' cemented with 275 sacks of Sunset cement

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Shaft B-#1 Well, located C SE SW of Section 7, Township 31 South, Range 14 West, Barber County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite

Leslie Kite

STATE OF KANSAS)
) SS
COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 30th day of March, 1969.

Ulanda Nichols

Ulanda Nichols

My Commission Expires:
April 1, 1971