

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-065-22964-00-00
Spot: SENENWNW Sec/Twnshp/Rge: 17-8S-22W
500 feet from N Section Line, 1150 feet from W Section Line
Lease Name: RICE TRUST C Well #: 1-17
County: GRAHAM Total Vertical Depth: 3618 feet

Operator License No.: 3293
Op Name: RUSSELL OIL, INC.
Address: PO BOX 8050
EDMOND, OK 73083

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3502		
PC		1776		
PROD	5.5	3592		110 SX
SURF	8.625	217		175 SX
T1	2.375	3498		

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/02/2013 12:00 PM
Plug Co. License No.: 99977 Plug Co. Name: QUALITY OIL WELL CEMENTING
Proposal Rcvd. from: TODD A. BROWN Company: QUALITY OIL WELL CEMENTING Phone: (785) 445-6270

Proposed Plugging Method: Ordered 350 sx 60/40 pozmix 4% gel cement w/200 # hulls.
Port Collar at 1776' w/175 sx cement.
Perforations: 3356' - 3358', 3424' - 3428' and 3544' - 3548'.

Plugging Proposal Received By: CASE MORRIS WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 07/02/2013 1:45 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

Tied on to casing and pumped 50 sx cement w/200 # hulls followed by 11 sx gel, followed by 190 sx cement. Shut in pressure 900 psi.
Tied on to back side and squeezed full. Shut in pressure 350 psi.

GPS: 39.36338 -099.80447

Perfs:

Top	Bot	Thru	Comments
3512	3516		
3424	3428		

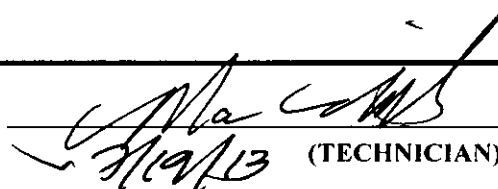
Remarks: QUALITY OILWELL CEMENTING TICKET # 7968

Plugged through: CSG

KCC WICHITA
JUL 12 2013
RECEIVED

District: 04

Signed


(TECHNICIAN)

CM

JUL 05 2013