

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-101-21,217-0000

LEASE NAME Sutton "V"

WELL NUMBER #1

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

2970 Ft. from S Section Line

3630 Ft. from E Section Line

SEC. 13 TWP. 17 RGE. 29 (E or W)

COUNTY Lane

Date Well Completed 9-17-85

Plugging Commenced 9:45 PM

Plugging Completed 12:30 AM 18th

LEASE OPERATOR Palomino Petroleum

ADDRESS P.O. Box 18610

PHONE# (316) 683-8152 OPERATORS LICENSE NO. 5161

Character of Well D & A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? District #1 Dodge City

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation D & A Depth to Top _____ Bottom _____ T.D. 4620

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
Surface hole	Sand & Shale	0	261	8 5/8	253'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.
Plug @ 2185' 50 sx, plug @ 1250' 80 sx, plug @ 295' 50 sx, plug @ 40' 10 sx & solid bridge, rathole 10 sx. 200 sx 60/40 pozmix, 6% gel.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor DNB Drilling, Inc. License No. 5476

Address 535 N. Oliver Wichita, KS 67208

STATE OF Kansas COUNTY OF Sedgwick, ss.

Bob Watchous (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.


(Signature) Bob Watchous

(Address) Box 18610 ; Wichita, Ks. 67218

SUBSCRIBED AND SWORN TO before me this 1st day of October, 19 85

Kathryn L. Frerking
STATE CORPORATION COMMISSION


My Commission Expires: August 21, 1989



OCT 3 1985
10-3-85
CONSERVATION DIVISION
Wichita, Kansas

15101-21217-0000

D N B Drilling, Inc.



J. L. DONELSON, PRES.
(316) 687-5471

ROTARY CONTRACTOR DRILLING DEALS

535 NORTH OLIVER

WICHITA, KANSAS 67208

DRILLERS' LOG

Palomino Petroleum
P.O. Box 18610
Wichita, KS 67218

#1 Sutton "V"
SW SE NW Sec. 13-17-29W
Lane County, Kansas

Commenced: 9-9-85
Completed: 9-17-85

Surface casing: Ran 6 jts. 8 5/8", 20# new casing. Tallied 253',
set @ 261'. Cemented with 200 sx 60/40 pozmix,
2% gel, 3% cc. Cement did circulate.

<u>FORMATION</u>	<u>DEPTH</u>
Sand & Shale	0-2156
Anhydrite	2156-2184
Shale	2184-3475
Shale & Lime	3475-4020
Lime	4020-4620 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

DNB Drilling, Inc.

By *James Donelson*


STATE OF KANSAS: ss:

Subscribed and sworn to before me this 20th day of September, 1985.

Vicky L. Coppage, Notary Public

My appointment expires:
May 28, 1989

Vicky L. Coppage

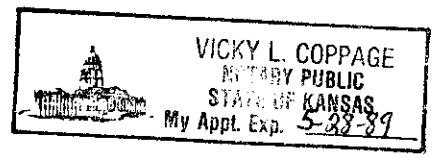

RECEIVED
STATE CORPORATION COMMISSION

OCT 3 1985