


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Saline County, Sec. 29 Twp. 16S Rge. (E) 1 (W)

Location as "NE/CNWxSWx" or footage from lines NW SE NE  
Lease Owner BM&S Oil Company - Guy Schultz  
Lease Name Karber Well No. 1  
Office Address Canton, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced December 12 19 66  
Plugging completed December 17 19 66  
Reason for abandonment of well or producing formation depleted

NORTH

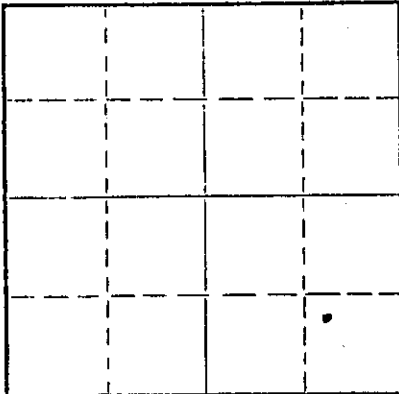

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman  
Producing formation Depth to top Bottom Total Depth of Well 2643 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	150'	8 5/8"	150'	none
		0	2631'	5 1/2"	2631'	2317.35

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pushed plug to 2600', set 10' rock bridge and dumped 5 sacks of cement at 2590'.

Bailed hole down to 160'. Set wood and rock bridge and dumped 20 sacks of cement. Filled hole with mud to 40', set 10' rock bridge and capped hole with 10 sacks of cement.

STATE CORPORATION COMMISSION  
JAN 5 1967  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Pipe Pullers, Inc.  
Address Box 486, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Dean Wells (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 20th day of December, 19 66

[Signature]  
Notary Public.

My commission expires July 7, 1968

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas


15169-00061-0000

Company- GEORGE HESS &  
R. JONES  
Farm- Karber No. 1

SEC. 29 T. 16 R. 1W  
NW SE NE

Total Depth. 2643'  
Comm. 9-19-55 Comp. 9-25-55  
Shot or Treated.  
Contractor. Mallard Drilling Company  
Issued. 4-13-57

County Saline KANSAS



Elevation. 1295' RB

CASING:

8 5/8" @150' w/90 sx cem.  
5 1/2" @2631' w/35 sx cem.

Production. Dry

Figures indicate Bottom of Formations.

Measurements taken from R.D.B.  
(5' from ground level.)

sand	50
shale & lime	150
lime	670
shale & lime	1615
lime	1895
shale & lime	2013
lime	2350
shale & lime	2630
Mississippi	2643
Total Depth	

TO'S	
Mississippi	2630
Kansas City	2013

RECEIVED  
STATE CORPORATION COMMISSION

DEC 9 1966

CONSERVATION DIVISION  
Wichita, Kansas

B. M. & S. Oil  
Box 316  
Canton, Kansas 67428