

STATE OF KANSAS
STATE CORPORATION COMMISSION

1510120526.0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

LANE _____ County, Sec. 33 Twp. 18 Rge. 30 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines N/2 S/2 SW/4

Lease Owner D.G. Hanen Trust
Lease Name Messinger Well No. ± 5
Office Address Box 187, Logan, KS 67646
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole


Date Well completed April 14, 1981
Application for plugging filed April 14, 1981
Application for plugging approved April 14, 1981
Plugging commenced April 14, 1981
Plugging completed April 14, 1981

Reason for abandonment of well or producing formation _____
Too low structural

If a producing well is abandoned, date of last production _____
19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes
Name of Conservation Agent who supervised plugging of this well Gilbert Baltazar

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4525'
Show depth and thickness of all water, oil and gas formations.

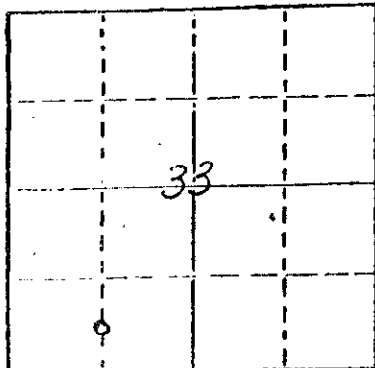

Locate well correctly on above Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	316'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy mud to 1140'. Set Plug.
Put in 60 Sks cement. Filled with heavy mud to 330'. Set Plug. Put in 30 Sks. Cement. Filled with heavy mud to 40'. Set Plug. Put in 10 SKS cement and filled to top with 5 SKS 50-50 Poz + 6% Gel.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor C-G Drilling Co., Inc. 340 Broadway Plaza Bldg. Wichita, KS. 67202



STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Jay H. Galloway (~~employee of owner~~) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jay H. Galloway
Jay H. Galloway 340 Brdwy Plaza Bldg.
(Address) Wichita, KS 67202

SUBSCRIBED AND SWORN TO before me this 18th day of April, 1981

My commission expires Feb. 9, 1985

Kristen G. Knoettgen Public.



Operator **DANE G. HANSEN TRUST** DESIGNATE TYPE OF COMP.: OIL, GAS, DRY HOLE, SWDW, ETC.: DRY HOLE

Well No. **# 5** Lease Name **MESSENGER**

S **33** T **18** R **30** E
W

WELL LOG

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
CIM ANHYDRITE	2218	673		
BASE/ANHYDRITE	2248	643		
HEEBNER	3904	1013		
TORONTO	3914	1023		
LANSING	3946	1055		
<p>DST #1 4124-4150, 15-45-60-45 REC 70' OCM 240' OCM 912' S/WTR, 7BHP 700 FBHP 620 IFP 260 FFP 700, DST#2 4173-4190' 15-45-15-45 REC 20' MUD IBHP 749 FBHP-749 IFP 40 FFP 42</p> <p>DST#3 4209-4226' 15-45-60-45 REC 370' MDY/WTR W/SPKS OIL IBHP 1146 FBHP 1096 IFP 40 FFP 190 DST #4 4238-4305' 15-45-90-45 REC 378' MDY S/WTR IBHP 1185 FBHP 1136 IFP 70 FFP 200, DST#5 4354-4408' 15-45-15-45 REC 15 MUD IB 958 938 16 16</p>				

RECEIVED
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 JUN - 4 - 81
 Wichita, Kansas

USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.

Date Received	<p align="center"> <i>Karl Kometzger</i> Signature <i>Office manager</i> Title 4/28/81 Date </p>
---------------	---