

REC'D MAR 20 1972 15169-00538-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

Saline County, Sec. 28 Twp. 16 Rge. 1 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE SW SW  
Lease Owner Tomlinson Oil Co., Inc.  
Lease Name Karber #1 Well No.  
Office Address Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 2/23/72 19  
Plugging completed 2/25/72 19  
Reason for abandonment of well or producing formation depleted.

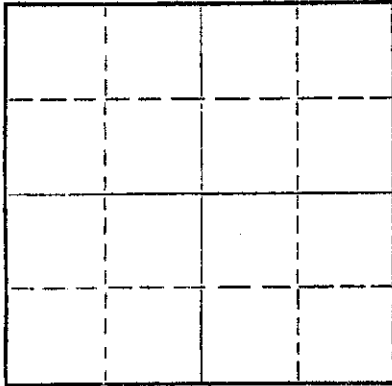

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Toman  
Producing formation Depth to top Bottom Total Depth of Well 543 Feet  
2610  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	120	none
				4 1/2"	2597'	543'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked bottom, bridge at 1564', couldn't knock bridge out.  
Pumped 4 sacks of cement on top of bridge, loaded hole, shot pipe at 1530', 909, 809, 709, 550, pulled 22 joints.  
Set 10' rock bridge at 160', dumped 35 sacks of cement. Mud to 40', 10' rock bridge and dumped 10 sacks of cement.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION

APR 11 1972

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
NOEL J. KNIGHT

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN to before me this 28th day of Feb. 19 72

Margaret Melcher  
Notary Public.

My commission expires  
MARGARET MELCHER  
NOTARY PUBLIC  
Rice County, Kansas  
My Commission Expires  
Feb. 15, 1975



ROTARY DRILLER'S LOG

15-169-00538-0000

E. K. Carey Drilling Co., Inc., Operator  
 Box 620  
 McPherson, Kansas

Elevation: 1277 K. B.  
 1274 D. F.

8-5/8" x 4 1/2" Head 6.20  
 below K. B.

Casing Record:

8-5/8" Csg. 120' W/80 ex.  
 4-1/2" Csg. 2597' W/75 ex.  
 Cemented 3' off bottom.

Frank Karber #1

Sec. 28-16S-1W  
 Saline County, Kansas

Well Commenced: 8-26-52  
 Well Completed: 9-2-52

Contractor: E. K. Carey Contractor (Rig #2) Box 620, McPherson, Kansas  
 Geologist: Don Heller, E. K. Carey Drlg. Co., 815 Central Bldg. Wichita

Figures Indicate Bottom of Formation K. B.

Cellar	7
Shale	40
Shale & shells	120
Anhydrite	225
Lime & shale	815
Shale & shells	1515
Lime	1796
Shale	1806
Shale & shells	1996
Lime	2266
Lime & shale	2342
Lime	2350
Shale & lime	2580
Shale	2598
Mississippi Chert	2600 T.D.

Geologist Tops:

Lansing 1992  
 Mississippi 2595 -1318

Rotary Total Depth 2600

4 1/2" casing @ 2597, 3 feet off bottom.

Cellar to T.D. 2611

RECEIVED  
 STATE CORPORATION COMMISSION  
 FEB 23 1972  
 CONSERVATION DIVISION  
 Wichita, Kansas

The above Rotary Driller's Log is complete and correct to the best of my knowledge.

E. K. CAREY CONTRACTOR

By Herbert A. Norton  
 Herbert Norton, Superintendent