

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Saline County, Sec. 28 Twp. 16 Rge. 1 W (E) (W)
Location as "NE/CNW/SW" or footage from lines. SW/4 SW/4 SE/4

Lease Owner Melland Drilling Inc.
Lease Name Millison Well No. I
Office Address 1111 North Main, Hutchinson, Kansas 67501
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 4-3 19 62
Application for plugging filed II-7 19 70
Application for plugging approved II-8 19 70
Plugging commenced II-9 19 70
Plugging completed II-10 19 70
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

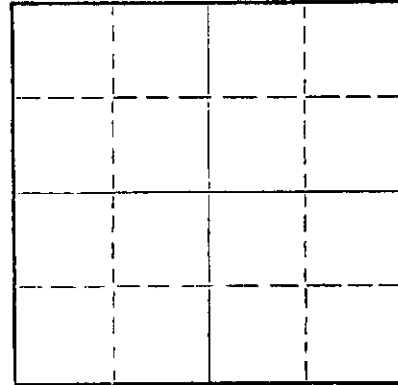

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2607' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		1,701'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged off bottom of hole with sand. Sand from 2607' to 1980'. Dumped 5 bx of cement. Mudded hole to 147'. Made 7' of rock bridge. Dumped 20 bx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 bx of cement, filling to the bottom of the collar.

RECEIVED
STATE CORPORATION COMMISSION
NOV 12 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas, COUNTY OF Reno, ss.
Art Lamb (employee of owner) or (operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) _____
2809 King St. Hutchinson, Kansas 67501
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of November, 1970

My commission expires January 5, 1974

[Signature]
Notary Public.

W E L L R E C O R D

15.169.00539.0000

Lease: Millison

Well No. 1

Location: SW/4 SW/4 SE/4
Section 28-16S-1W
Saline County, Kansas

Commenced: 3/28/62

Completed: 4/3/62
(rotary)

Operator: F. S. Williams
McPherson, Kansas

Contractor: Melland Drilling Co., Inc.
1111 North Main Street
Hutchinson, Kansas

RECEIVED
STATE CORPORATION COMMISSION
NOV 9 1970
CONSERVATION DIVISION
Wichita, Kansas

Casing Record: 8-5/8" at 147' with 95 sacks of cement.
5-1/2" at 2604 1/2' with 150 sacks of cement.

FORMATION

LOG

Surface soil, sand & shale	40	
Sand	72	
Shale	90	
Anhydrite	147	
Lime	260	
Lime & shale	415	
Lime	615	
Lime & shale	765	
Shale & shells	1405	
Shale & lime	1525	
Lime & shale	1812	
Sand & shale	1990	
Kansas City Lime	2105	
Lime & shale	2398	
Shale & shells	2525	
Shale	2603	
Mississippi Lime	2607	ROTARY TOTAL DEPTH