

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Saline

County. Sec. 27 Twp. 16S Rge. 1W (E) (W)

Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines SW SW SE

Lease Owner L. B. Jackson, Jr.

Lease Name Threlkeld Well No. 1

Office Address 503 McBirney Bldg., Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dryhole

Date well completed December 19, 19 49

Application for plugging filed December 19, 19 49

Application for plugging approved December 19, 19 49


Plugging commenced December 19, 19 49

Plugging completed December 19, 19 49

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

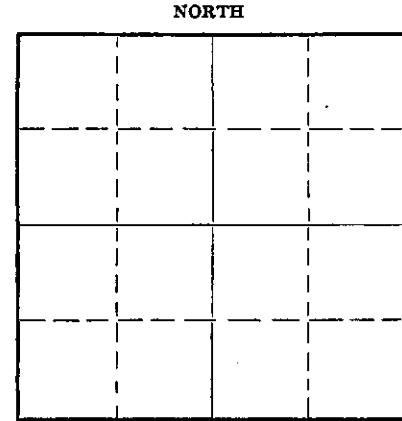

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation NONE Depth to top Bottom Total Depth of Well 2732 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	139'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 135 feet to 20 feet for each plug set.

Went in hole with one-half of the drillpipe; gunned pits and circulated heavy mud one-half hour; came out of hole laying down drillpipe, and filled hole with mud to bottom of surface pipe, 139 feet; set plug and placed 30 sacks of cement on top of plug; filled hole to within 20 feet of bottom of cellar, and placed plug and cemented with 5 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to L. B. Jackson, Jr.
Address 503 McBirney Bldg., Tulsa, Oklahoma

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
L. B. Jackson, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *L. B. Jackson, Jr.*

503 McBirney Bldg., Tulsa, Oklahoma (Address)

SUBSCRIBED AND SWORN TO before me this 28th day of December

RECEIVED
Joe Christian, Div. Notary Public.

My commission expires March 18, 1950

22-7377-5 4-49-10M

PLUGGING
FILE SEC 27 T 16 R 1W
BOOK PAGE 131 LINE 28

JAN 3 X 1950

CONSERVATION
DIVISION
KANSAS

W E L L R E C O R D

COUNTY Saline , Section 27, Township 16 South, Range 1 West
 COMPANY OPERATING L. B. Jackson, Jr.
 OFFICE ADDRESS 503 McBirney Bldg., Tulsa, Oklahoma
 FARM NAME Threlkeld WELL NO. 1
 DRILLING STARTED December 8, 1949 DRILLING FINISHED December 19, 1949
 DATE OF FIRST PRODUCTION Dry hole
 WELL LOCATED SW $\frac{1}{4}$ SW $\frac{1}{4}$ SE $\frac{1}{4}$
 CHARACTER OF WELL Dry hole

FORMATION RECORD

Formation	Top	Bottom
Shale and Lime	0	25
Sand	25	32
Shale	32	60
Shale and Shells	60	121
Cement hard	121	139
Shale Shells	139	255
Lime Sand & Shale	255	480
Shale Lime Shell	480	630
Lime - Shale	630	850
Lime & Shale	850	920
Shale & Shells	920	1150
Shale & Shell	1150	1370
Shale and Shell	1370	1560
Lime with Shale Streaks	1560	1665
Lime with Shale Streaks	1665	1750
Lime	1750	1805
Lime	1805	1885
Sand	1885	1900
Sand	1900	1930
Lime	1930	2000
Shale Lime	2000	2040
Lime	2040	2068
Lime	2068	2112
Lime	2112	2184
Lime	2184	2236
Shale	2236	2261
Lime	2261	2275
Lime - Shale	2275	2324
Lime	2324	2384
Shale and Lime	2384	2442
Lime	2442	2534
Lime Shale	2534	2585
Shale	2585	2651
Shale	2651	2673
Shale	2673	2682
Lime Chat	2682	2712
Chat and Lime	2712	2732
Total Depth		2732

I, the undersigned, being first duly sworn upon oath, state that this well record is true, correct and complete according to the records of this office and to the best of my knowledge and belief.

L. B. Jackson, Jr.

Subscribed and sworn to before me this 30th day of December, 1949.

Joe Christian
Notary Public

My commission expires:
March 18, 1950