


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

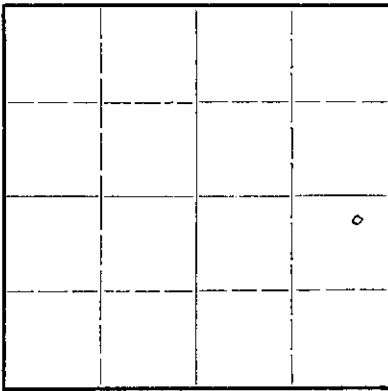

Locate well correctly on above
Section Plat

Saline County. Sec. 22 Twp. 16 Rge. 1 ~~(W)~~ (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. C. NE-NE-SE $\frac{1}{4}$
Lease Owner D.D. Fowler & et al
Lease Name Bickel Well No. 1
Office Address 711 Midland Building Kansas City 6, Missouri
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 17, 1946 19.
Application for plugging filed November 16, 1946 19.
Application for plugging approved November 17, 1946 19.
Plugging commenced November 17, 1946 19.
Plugging completed November 17, 1946 19.
Reason for abandonment of well or producing formation Dry Hole in Chat

If a producing well is abandoned, date of last production 19.
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Depth to top Bottom Total Depth of Well 2638 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|-----------------------|--------------|-------------|-------------|------------------|--------------------|-------------|
| <u>Sand and Shale</u> | <u>water</u> | <u>40</u> | <u>70</u> | <u>8 5/8" OD</u> | <u>115'</u> | <u>None</u> |
| <u>Miss. Chat</u> | | <u>2633</u> | <u>2638</u> | <u>no pipe</u> | <u>set on chat</u> | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Circulated heavy mud through drill pipe at bottom at 1300'
Laid down 1300' Drill pipe filled hole with mud to 115' from top of hole
Formed Bridge at 115' and dumped from top 15 sacks of cement filling hole
from 115 ft up to 65 ft. Mud to 20 ft. of Derrick floor- 5 sacks of cement
from 20 ft to bottom of cellar.

22 16 (W)
82 43

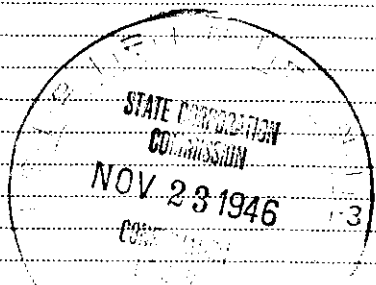

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Herbert Rhoton with E. K. Carey, Contractor
Address Box 620 McPherson, Kansas

STATE OF Kansas, COUNTY OF McPherson, ss.
Herbert Rhoton (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) Herbert Rhoton

Box 620 McPherson, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22 day of November, 1946

Wilbur Egan
Notary Public.

MY COMMISSION EXPIRES, AUGUST 1, 1949
My commission expires

