

STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

K.A.R.-82-3-117

API NUMBER 15-101-21,061-0000

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR American Energies Corporation

ADDRESS 575 Fourth Financial Center

PHONE # 816) 263-5785 OPERATORS LICENSE NO. 5399

Character of Well Oil

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? yes

Which KCC/KDHE Joint Office did you notify? #1

Is ACO-1 filed? Yes If not, is well log attached?
Altamont "A"

Producing formation Marmaton Depth to top bottom T.D. 4645'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From 0	To 301'	Size 8 5/8"	Put in 301'	Pulled out -0-
		301'	4645	4 1/2"	4643	921.82


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from feet to feet each set. Bottom plugged w/sand to 3985' w/ 4 sks. cement on top w/dumpbailer - top plugged w/in order, 3 sks. hulls, 15 sks gel 50 sks cement, 10 sks gel, 1 sk hulls, 8 5/8 wiper plug, 150 sks cement, top plug pumped w/pump truck (cement 60/40 POZ 6% gel

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Hembree Well Service, Inc. License No. 960
Address 302 E. Sycamore, Box 458, Ness City, Ks. 67560

STATE OF Kansas COUNTY OF Sedgwick, ss.

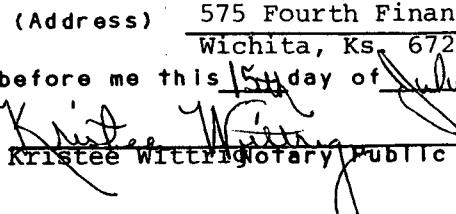
Alan L. DeGood (employee of operator) or
(operator) of above-described well, being first duly sworn on oath, says: That
I have knowledge of the facts, statements, and matters herein contained and
the log of the above-described well as filed that the same are true and
correct, so help me God.

(Signature) 
Alan L. DeGood


(Address) 575 Fourth Financial Ctr.

Wichita, Ks. 67202

RECEIVED
01-10-1985
SUBSCRIBED AND SIGNED TO before me this 15th day of July, 1985


Kristee Wittig Notary Public

My Commission expires: 8/31/87



CONSERVATION DIVISION
Wichita, Kansas