


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

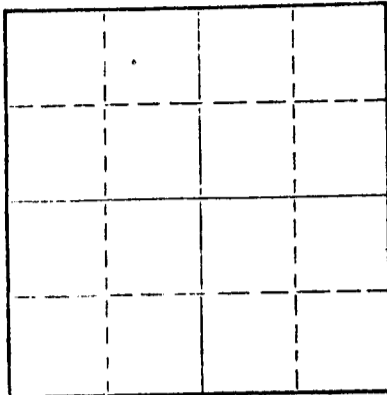

Locate well correctly on above
Section Plat

Lane _____ County. Sec. 30 Twp. 17S Rge. 29W (E) _____ (W) X
Location as "NE/CNW/SW" or footage from lines NW NW NE
Lease Owner Okmar Oil Company
Lease Name Cronic Well No. 1
Office Address 1130 Vickers-KSB&T Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed May 16 19 74
Application for plugging filed May 16 19 74
Application for plugging approved May 16 19 74
Plugging commenced May 16 19 74
Plugging completed May 16 19 74
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. W.L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4620 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	308'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st Plug @ 1210' w/70 sx.
2nd Plug @ 315' w/20 sx.
1/2 sk. Hulls & Plug @ 40' w/10 sx. cmt.
Cmt. was 50-50 pozmix, 6% total gel.

RECEIVED
STATE CORPORATION COMMISSION

MAY 21 1974

CONSERVATION DIVISION
Wichita, Kansas

05-21-1974

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202


STATE OF Kansas, COUNTY OF Sedgwick, ss.

Jim Farrice (employee of owner) or (owner or operator) of the above-described

do hereby certify, sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the well as filed and that the same are true and correct. So help me God.

(Signature) Jim Farrice
1720 Wichita Plaza, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of May, 19 74



Linda H. Dickens
Notary Public.

My commission expires March 8, 1977

15-10-20090.0000

DRILLERS LOG

No. 1 Cronc

CASING RECORD:

3-5/8" @ 308'
w/200 sx cmt

TOTAL DEPTH: 4620'

COMPANY: Okmar Oil Co.

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: May 6, 1974

COMPLETED: May 16, 1974

DESCRIPTION:

NW NW NE
30-175-29H
Lane County,
Kansas

ELEVATION: 2027' Gr.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay, Sand & Shale	0	310	
Shale, Shells, Sand Strks.	310	1155	
Shale & Sand	1155	1910	
Sand	1910	1980	
Shale & Redbed	1980	2216	
Anhydrite	2216	2244	
Shale & Lime	2244	2625	
Lime & Shale	2625	3755	
Lime	3755	4620	

RECEIVED
STATE CORPORATION COMMISSION
MAY 21 1974
CONSERVATION DIVISION
Wichita, Kansas

05-21-1974

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Jim Farrice
Jim Farrice

Subscribed and sworn to before me this 17th day of May, 1974.

Linda H. Dickens
Notary Public

My Commission Expires:

March 3, 1977

