


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

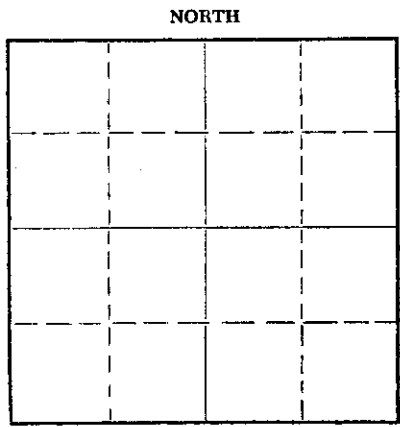

Locate well correctly on above Section Plat

Sedgwick County, Sec. 17 Twp. 26 Rge. 1 (E) X (W)
Location as "NE/CNW&SW&" or footage from lines NW-NW-NE
Lease Owner E. H. Adair Oil Company
Lease Name Flanagan Well No. 1
Office Address 1005 East Second Street, Wichita 14, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 4-30-60 19__
Application for plugging filed 4-30-60 19__
Application for plugging approved 4-30-60 19__
Plugging commenced 4-30-60 19__
Plugging completed 4-30-60 19__
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Lee Guthrie
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3100 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8" | 200' | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 200 feet, set plug and bridge of hulls and 15 sacks cement,
Mud to 35 feet, plug, hulls and 10 sacks of cement,
2 sacks in rathole.

RE STATE CO 5-12-60
MAY 12 1960
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E. H. Adair Oil Company
Address 1005 East Second Street, Wichita 14, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
K. W. Johnson (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) K. W. Johnson
Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of May, 19 60

My commission expires September 15, 1961 L. Hill Notary Public.



E. H. Adair Oil Company
1005 East Second Street
Wichita 14, Kansas.

f

E. H. Adair Oil Company
Flanagan No. 1
NW-NW-NE of
Sec. 17-26-1E.
Sedgwick County, Kansas
Elevation: 1336 K.B.

Comm: 4-23-60
Comp: 4-30-60
Contractor:
E. H. Adair - Rig No. 3
8-5/8" s/csg. @ 200' w/150 sx.
Pro: D. & A.

Figures indicate bottoms of formations:

| | | | |
|--------------|------|---------------------|------|
| Lime & Shale | 2200 | Black Shale | 2696 |
| Shale | 2243 | Lime | 2717 |
| Lime | 2250 | Black Shale | 2722 |
| Sandy Lime | 2268 | Lime | 2744 |
| Lime | 2292 | Shale | 2790 |
| Shale | 2396 | Lime & Shaley Lime | 2872 |
| Lime | 2400 | Lime | 2942 |
| Shale | 2410 | Lime & Shaley Lime | 2994 |
| Lime | 2440 | Shale & Little Lime | 3040 |
| Shale | 2511 | Varicolored Shale | 3081 |
| Lime | 2516 | Chert | 3100 |
| Shale | 2585 | | |
| Lime | 2690 | RTD | 3100 |

| | | |
|-------------------|------|---------|
| KANSAS CITY | 2585 | (-1249) |
| BASE KANSAS CITY | 2744 | (-1408) |
| MISSISSIPPI CHERT | 3081 | (-1745) |
| RTD | 3100 | |

Certified correct:

K. W. Johnson
K. W. Johnson
Geologist.

100
SON
Kansas