

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-101-21,234 0000

LEASE NAME Snider

WELL NUMBER S-1

SPOT LOCATION S/2 SE SW

SEC. 9 TWP. 17S RGE. 29W (E) or (W) (W)

COUNTY Lane

Date Well Completed _____

Plugging Commenced 2-27-86

Plugging Completed 3-12-86

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Donald C. Slawson

ADDRESS 200 Douglas Bldg. Wichita, Ks. 67202

PHONE # (316) 263-3201

OPERATORS LICENSE NO. _____

Character of Well Oil
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? Dodge City, Kansas

Is ACO-1 filed? _____ If not, Is well log attached? _____

Producing formation _____ Depth to top _____ bottom _____ T.D. 4630'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
				8-5/8"	329'	none
				4-1/2"	4629'	2493'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from _____ feet to _____ feet each set.

Plugged off bottom with sand to 4480' and 4 sacks cement. Shot casing @3001', 2493' and pulled a total of 59 joints (2493') of 4-1/2" casing. Plugged surface with 3 hulls, 15 gel, 70 cement, 10 gel, 1 hull, 8-5/8" plug and 150 cement.

Plugging Complete

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Kelso Casing Pulling License No. 6050

Address P.O. Box 347 Chase, Kansas 67524

STATE OF Kansas COUNTY OF Rice, ss.

R. Darrell Kelso (employee of operator) or
(operator) of above-described well, being first duly sworn on oath, says: That
I have knowledge of the facts, statements, and matters herein contained and
the log of the above-described well as filed that the same are true and
correct, so help me God.


(Signature) R. Darrell Kelso

(Address) Box 347 Chase, Kansas 67524

SUBSCRIBED AND SWORN TO before me this 19th day of March, 19 86

STATE OF KANSAS
Jane Hoover
Notary Public

My Commission expires:




MAR 21 1986
3-21-86
CONSERVATION DIVISION
Wichita, Kansas

Form CP-4
Revised 01-84

DONALD C. SLAWSON

WELL RECORD

1510121234-0000

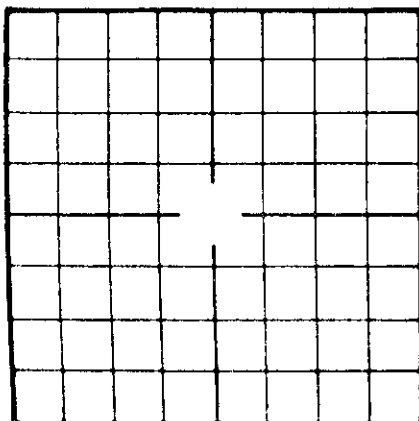

LEASE SNIDER 'S' Well No. #1

OPERATOR D.C.S.

LOCATION S/2-SE-SW

SECTION 9 TWP 17s RANGE 29w

SURVEY _____ BLOCK _____ SECTION _____

COUNTY Lane STATE Kansas

STAKED BY L & S DATE _____ ELEVATION 2817 KB

TOOLS	STARTED	COMPLETED	FROM	TO	CONTRACTOR
ROTARY	10-15-85	10-26-85	0'	4630'	Slawson Drlg. Co. Rig #2
COMPLETION					

OPEN HOLE LOGS Dresser AtlasCOMPLETION INTERVALS 4533' & 4541½' 1-3/8 bullet each

FORMATION

Shz

PBTD 4569

CASING, TUBING AND RODS

JOINTS	SIZE	WT	COUPLING	GRADE NEW/USED	SETTING DEPTH	CEMENT		REMARKS
						SACKS	EST. TOP	
7	8 5/8"	23#		new				
2	8 5/8"	24#		new	329'	225		GL Circ.
111	4½"	10.5#	J-55	new	4629'	125		
<u>Not Economic - Will P&A</u>								

STIMULATION RECORD

Treatment Frac / Acid	Acid			
Date	11/7/85			
Quantity (Gals.)	1250			
Type	MOD 202			
Proppant				
Tubing / Casing	Casing			
Breakdown Pressure	800			
Treat Pressure	1500			
Instant SIP	400			
Total Bbls. Load	133			
Flush Agent	Water			
Oil/Gas Before	None			
Oil/Gas After				
Water Before	None			
Water After				
Done By	Halliburton			

Initial Potential (Data)

(BODS / AMPS)

PUMPING UNIT

Manufacturer _____

Size _____

Serial No. _____

PRIME MOVER

Manufacturer _____

Size _____

Serial No. _____

TANK BATTERY
