

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rush County. Sec. 20 Twp. 18S Rge. 18W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
NE NW NW


Lease Owner J. A. Allison
Lease Name Bailey Well No. 1
Office Address 300 W. Douglas, Suite 305, Wichita, Ks.
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed May 19 19 81
Application for plugging filed May 19 19 81
Application for plugging approved May 19 19 81
Plugging commenced May 19 19 81
Plugging completed May 19 19 81
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Schmidt
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3877'
Show depth and thickness of all water, oil and gas formations.

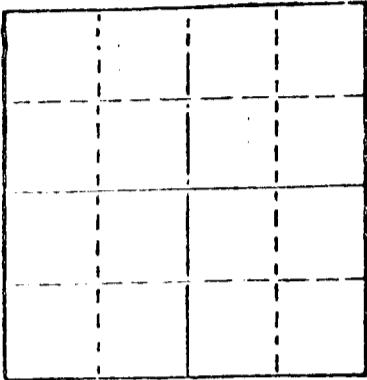

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	1225'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged with 55 sx @ 1240',
40 sx @ 270', Bridge @ 40' w/10 sx,
5 sx in rathole.

RECEIVED
STATE CORPORATION COMMISSION

MAY 26 1981

5-26-81
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor B & B Drilling, Inc.

STATE OF KANSAS COUNTY OF SEDGWICK

Bill G. Lahar (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill G. Lahar
515 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 20 day of May, 19 81

My commission expires



Betty M. Abbott
Betty M. Abbott Notary Public.

DRILLERS LOG

May 20, 1981

#1 Bailey
 NE NW NW
 Sec. 20-18S-18W
 Rush County, Kansas

OPERATOR: J. A. Allison
 CONTRACTOR: B & B Drilling, Inc.
 COMMENCED: May 11, 1981
 COMPLETED: May 19, 1981

8 5/8" @ 1225' w/425 sx.

0	1206	Shale
1206	1243	Anhydrite
1243	2133	Shale
2133	2387	Shale & Lime
2387	2793	Lime
2793	3631	Lime & Shale
3631	3877	Lime
3877		RTD

D & A

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 20 1981
 5-26-81
 CONSERVATION DIVISION
 Wichita, Kansas

We certify that the above and foregoing is a true and correct copy of the log on the #1 Bailey located in Rush County, Kansas.

B & B DRILLING, INC.

Bill G. Lahar
 Bill G. Lahar

Subscribed and sworn to before me this 20th day of May, 1981.

Betty M. Abbott
 Betty M. Abbott-Notary Public

