

15-135-21061-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Ness County, Sec. 34 Twp. 20S Rge. (E) 22 (W)

Location as "NE/CNWxSWx" or footage from lines C NE SW

Lease Owner O. A. Sutton

Lease Name Pfaff Well No. 1

Office Address 800 Sutton Place, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 11 1975

Application for plugging filed June 11 1975

Application for plugging approved June 11 1975


Plugging commenced June 11 1975

Plugging completed June 11 1975

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

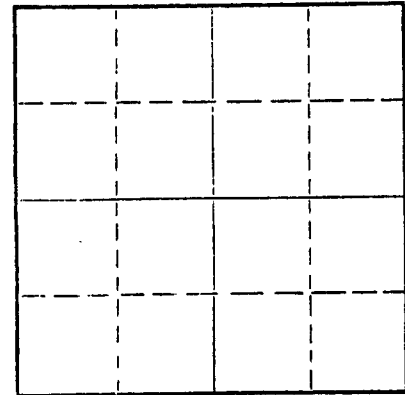

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4383 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	459'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

60-40 Pozmix

Plug @ 435' with 50 sacks/; 2nd plug at 40' with solid bridge and 10 sacks. Job by Halliburton. Job complete at 7:15 a.m. 6-11-75.

RECEIVED
STATE CORPORATION COMMISSION

JUN 26 1975
6-26-75
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.

Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Jack G. Paulsen (employee of owner) or ~~known operator~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack G. Paulsen
800 Sutton Place, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of June, 1975.

My commission expires June 28, 1978.

Jean S. Taylor
Notary Public.

15-135-21061-0000

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Pfaff #1
C-NE-SW Sec 34-20S-22W
Ness County Kansas

Commenced: 5-31-75

Completed: 6-11-75

OPERATOR: O. A. SUTTON

Depth		Formation	Remarks
From	to		
0	463	Shale-Sand-Clay	Ran 11 jts of used 28# 8 5/8" csg set @ 459' Cemented w/ 250 sks Common 2% Gel 3% CC PD @ 12:15 a.m. 6-1-75
463	750	Shale-Shells	
750	761	Blaine	
761	830	Shale-Shells	
830	1040	Sand	
1040	1383	Shale-Redbed	
1383	1418	Anhy	
1418	1650	Shale	
1650	1850	Shale-Shells	
1850	2150	Shale-Lime	
2150	2450	Lime-Shale	DRY & ABANDONED
2450	2612	Shale-Lime	
2612	3011	Lime-Shale	
3011	3277	Lime	
3277	3890	Lime-Shale	
3890	4379	Lime	
4379	4383	Lime-Shale	
	4383 TD		

RECEIVED
STATE CORPORATION COMMISSION
JUN 26 1975
CONSERVATION DIVISION
Wichita, Kansas

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled C-NE-SW Sec 34-20S-22W Ness County Kansas to the best of my knowledge and belief.

James S. Sutton II
JAMES S. SUTTON II

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 18th day of June, 1975, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

Elizabeth J. Edwards
ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission Expires: February 6, 1979

