


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

NORTH

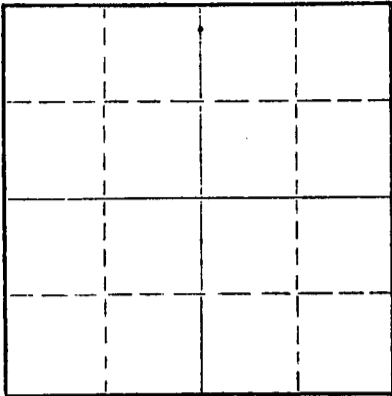

Locate well correctly on above  
Section Plat

Ness County. Sec. 33 Twp. 20S Rge. (E) 22 (W)  
Location as "NE/CNW%SW%" or footage from lines C SE SW  
Lease Owner Rockwood Petroleum Co.  
Lease Name McFadden Well No. 1  
Office Address 815 Douglas Building, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed September 7 19 78  
Application for plugging filed September 7 19 78  
Application for plugging approved September 7 19 78  
Plugging commenced September 7 19 78  
Plugging completed September 7 19 78  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 4403 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	421'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Squeezed through 8-5/8" with 125 sacks 50-50 Pozmix, 6% gel;  
5 sacks in rat hole. Job complete at 2:30 a.m. 9-7-78. Job  
by Halliburton.

RECEIVED  
STATE CORPORATION COMMISSION

SEP 18 1978

9-18-78

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Gabbert-Jones, Inc.  
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Jack G. Paulsen (employee of owner or owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

Jack G. Paulsen  
815 Douglas Building, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN to before me this 15th day of September, 1978.

My commission expires June 28, 1982.

Jean S. Taylor  
Notary Public.



15-135-21508 0000

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

McFadden #1  
C-SE-SW Sec 33-20S-22W  
Ness County Kansas

Commenced: 8-29-78

Completed: 9-7-78

OPERATOR: ROCKWOOD PETROLEUM

Depth		Formation	Remarks
From	to		
0	40	Surface Clay-Post Rock	Ran 10 jts of 28# 8 5/8" csg set @ 421' Cemented w/ 250 sks Common 2% Gel 3% CC PD @ 12:30 a. m. 8-30-78
40	425	Sand-Shale	
425	1245	Shale-Redbed	
1245	1431	Shale-Shells	
1431	1467	Anhydrite	
1467	1925	Shale-Shells	
1925	2210	Shale-Lime	
2210	4075	Lime-Shale	
4075	4403	Lime	
	4403		

STATE OF KANSAS )  
                          ) SS.  
COUNTY OF SEDGWICK)

I, the undersigned, being duly sworn on oath, state that the above Drillers' Well Log is true and correct to the best of my knowledge and belief and according to the records of this office.

GABBERT-JONES, INC.

*James S. Sutton II*  
JAMES S. SUTTON II

Subscribed and sworn to before me this 14th day of September, 1978.

*Elizabeth J. Edwards*  
ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission expires February 6, 1979.

