


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Ness County, Sec 33 Twp 20 S Rge (E) 22 (W)

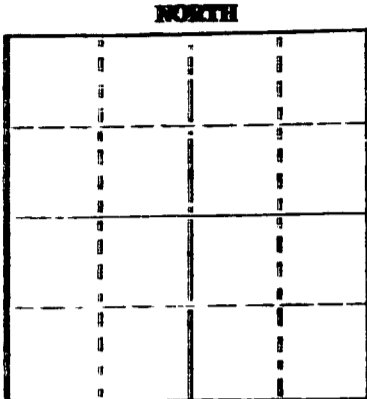

Locate well correctly on above Section Plat

Location as "NE/CNWSW" or footage from lines NE NE  
Lease Owner O. A. Sutton  
Lease Name Barriclaw Well No. 1  
Office Address 800 Sutton Place Wichita Kansas 67202  
Character of Well (completed as Oil, Gas or Day Hole) Oil  
Date well completed \_\_\_\_\_ 1974  
Application for plugging filed \_\_\_\_\_ 12/26 1974  
Application for plugging approved \_\_\_\_\_ 1/2 1975  
Plugging commenced \_\_\_\_\_ 1/2 1975  
Plugging completed \_\_\_\_\_ 1/4 1975  
Reason for abandonment of well or producing formation pipe collapsed  
Drilled second well for same location  
If a producing well is abandoned, date of last production \_\_\_\_\_ 1974  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation arbuckle Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3600  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	500	8 5/8		
		0	3600	5 1/2		1699

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

100 sx cement at 3200

Pumped top with Halliburton thru plug container 20 sx. Jell release plug and pump 125 sx. 60 - 40 P02mix 600# pump pressure 400# shut in pressure

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Nicholas Casing Pulling  
Address Box 373 Geneseo Kansas 67444

STATE OF Kansas COUNTY OF Rice SE


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George A. Nicholas

Subscribed and Sworn to before me this seventh day of January, 19 75

My commission expires August 27, 1978

Notary Public



RECEIVED  
STATE CORPORATION COMMISSION

JAN 8 1975  
1-8-75  
CONSERVATION DIVISION  
Wichita, Kansas

15-135-20874-0000

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

Barricklow #1  
C-NE-NE Sec 33-20S-22W  
Ness County Kansas

Commenced: 6-2-74

Completed: 6-15-74

OPERATOR: O. A. SUTTON

Depth		Formation	Remarks
From	to		
0	100	Sand-Surface Clay	
100	580	Shale	Ran 10 jts of used 28#
580	840	Shale-Redbed	8 5/8" csg set @ 411'
840	1050	Sand	Cemented w/250 sks common
1050	1413	Shale	2% Gel 3% CC. PD @ 8:30 p.m.
1413	1436	Anhy	6-2-74
1436	1635	Shale-Shells	
1635	1978	Shale	
1978	2210	Shale-Lime	Ran 139 jts of used 14# 5 1/2"
2210	2560	Lime-Shale	csg set @ 4409' cemented
2560	3175	Shale-Lime	w/100 sks salt sat Posmix
3175	3700	Lime-Shale	PD @ 12:15 a.m. 6-15-74
3700	4410	Lime	
	4410 TD		

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled C-NE-NE Sec 33-20S-22W Ness County Kansas to the best of my knowledge and belief.

*James S. Sutton II*  
JAMES S. SUTTON II


STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this the 20th day of June 1974, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

*Marjorie Hall*  
MARJORIE HALL-NOTARY PUBLIC

My Commission Expires: November 29th, 1975



RECEIVED  
STATE CORPORATION COMMISSION  
JUN 13 1975  
CONSERVATION DIVISION  
Wichita, Kansas