


15-165-20565-0000

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

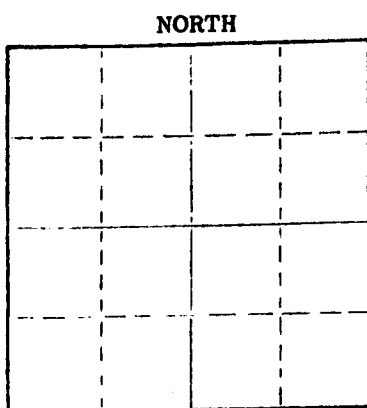

Locate well correctly on above Section Plat

Rush County, Sec. 10 Twp. 19S Rge. 20 (E) W (W)
Location as "NE/CNWxSWx" or footage from lines 150' SE of NE SW NW
Lease Owner Rains & Williamson Oil Co., Inc.
Lease Name Yost "A" Well No. 1
Office Address 435 Page Court, 220 W. Douglas, Wichita
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 17 19 76
Application for plugging filed June 17 19 76
Application for plugging approved June 17 19 76
Plugging commenced June 17 19 76
Plugging completed June 17 19 76
Reason for abandonment of well or producing formation
Commercial quantities of oil not found
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4240 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	402'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug @ 540' with 50 sx.
Plug @ 300' with 25 sx.
Plug @ 40' with 10 sx.
JUN 24 1976
6-24-76

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rains & Williamson Oil Co., Inc.
Address 435 Page Court, 220 W. Douglas, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.
Wilson Rains (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains
435 Page Court, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 22 day of June, 19 76



My commission expires 10-4-79
Janita M. Green Notary Public.

15-165-20565-0000

WELL LOG

COMPANY Rains & Williamson Oil Co., Inc.

SEC. 10 T. 19S R. 20W
LOC. 150' SE of NE SW NW

FARM Yost

NO. "A" #1


RIG. NO. 7

TOTAL DEPTH 4240'

COUNTY Rush
KANSAS

COMM. 6-8-76

COMP. 6-17-76



CONTRACTOR Rains & Williamson Oil Co., Inc.

CASING

20	10	
15	8	5/8" set @ 402' w/ 250 sx. 2% gel
12	6	3 % cc.
13	5	

ELEVATION 2194 KB

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

Rock, Sand & Shale	404
Shale	848
Dakota Sand	1040
Shale	1422
Anhydrite	1451
Shale	2090
Shale & Lime	2878
Lime & Shale	3060
Shale & Lime	3810
Lime & Shale	3910
Lime	4213
Sand	4215
Lime	4240
<u>R.T.D.</u>	<u>4240</u>

6-24-76

State of Kansas }
 County of Sedgwick } ss:

I, Wilson Rains, President of the Rains & Williamson Oil Co. Inc. Company

upon oath state that the above and foregoing is a true and correct copy of the log of the Yost "A" #1 well.

Wilson Rains
 WILSON RAINS

Subscribed and sworn to before me this 22 day of June 1976

My Commission Expires: 10-4-79

Juanita M. Green
 NOTARY PUBLIC
 Juanita M. Green