

15-072-20135-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202


Harper County, Sec. 33 Twp. 31 Rge. 7 E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines

C S/2 SW SE
Lease Owner Okmar Oil Company
Lease Name Barnes #1 Well No.
Office Address Hays, Kansas 67601
Character of Well (Completed as Oil, Gas or Dry Hole)

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 10/12/77 19
Plugging completed 10/17/77 19
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Owens
Producing formation Depth to top Bottom Total Depth of Well 4740
Show depth and thickness of all water, oil and gas formations.

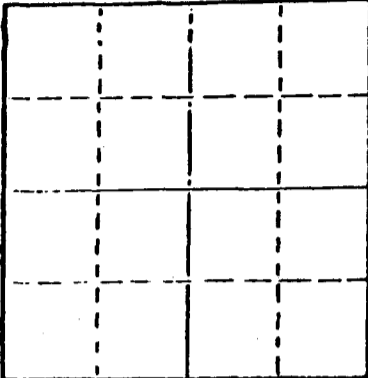

Locate well correctly on above Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	251	none
				5 1/2"	4738	4233'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded to 4700' and ran 5 sacks cement. Shot pipe at 4210', pulled 125 joints.
Mudded to 300' and set 25' rock bridge to 275', filled hole with 5 yards ready mix from 275' to base of cellar.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
OCT 2 1977
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 20th day of October, 19 77



Margaret Melcher
Notary Public.

My commission expires

WELL LOG
Barnes #1
S/2 SW SE 33-31-7W
Harper County, Kansas

Name of Operator: Okmar Oil Company
1130 Wichita Plaza
Wichita, Kansas 67202

Date Completed: 12-7-71

<u>FROM</u>	<u>TO</u>	
0	36	Soil : Sand
36	40	Shale
40	250	Sand and shale
250	918	Shale
918	3595	Shale and lime
3595	3665	Sand
3665	3690	Lime and shale
3690	4740	Lime
4740		T.D.

8 5/8 @ 250' w/225 sf
5 1/2 @ 4738' w/75 sf

STATE OF KANSAS

COUNTY OF BARTON ss

Gary L. Hawk, Secretary of Sweetman Drilling, Inc., being first duly sworn on oath says: That I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct.

Gary L. Hawk
Gary L. Hawk

Subscribed and sworn before me this 8th day of December, 1971.

Mary Ann Schwamborn
Notary Public Barton County

My Commission Expires 7-10-73

