

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Ness County, Sec. 3 Twp. 16 Rge. (E) 23 (W)

Location as "NE/CNW%SW%" or footage from lines C SE SW

Lease Owner Braden Drilling, Inc.

Lease Name Clews Well No. 1

Office Address 1620 Wichita Plaza, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry

Date well completed November 12 1964

Application for plugging filed November 12 1964

Application for plugging approved November 12 1964


Plugging commenced November 12 1964

Plugging completed November 12 1964

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

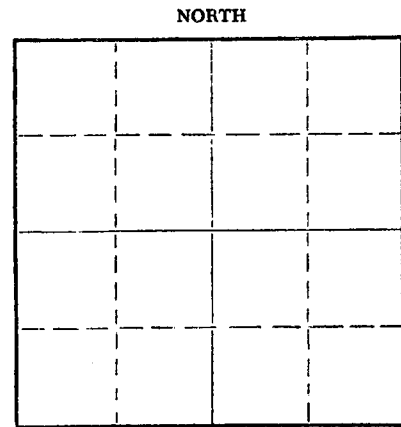

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 4451 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	248	8 5/8	241	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

20 sacks cement at 600'  
Plug and 20 sacks cement at 240'  
Plug and 10 sacks cement at 40'

RECEIVED  
STATE CORPORATION COMMISSION

NOV 17 1964  
11-17-64

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Braden Drilling, Inc.

Address 1620 Wichita Plaza, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

James Tasheff (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James Tasheff

(Address)

SUBSCRIBED AND SWORN TO before me this 16 day of November, 1964

Notary Public

My commission expires March 21, 1966

DRILLER'S LOG

Braden Drilling, Inc.  
 CLEWS #1  
 C SE SW Sec. 3-16S-23W  
 Ness County, Kansas

Commenced: November 2, 1964

Completed: November 12, 1964

Set 8 5/8" at 248' and cemented  
 with 225 sacks cement.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
Surface soil and sand	0	40
Post rock and sand	40	105
Shale and shells	105	250
Grey shale	250	745
Sand	745	780
Shale	780	835
Shale and shells	835	1009
Sand	1009	1058
Shale and shells	1058	1201
Sand	1201	1426
Shale	1426	1747
Shale and lime	1747	1790
Shale	1790	1900
Shale and shells	1900	2320
Shale and lime	2320	2687
Lime	2687	2716
Shaley Lime	2716	2825
Shale and lime	2825	2942
Shale and lime streaks	2942	3150
Shale and lime	3150	3435
Shale, lime and chalk	3435	3649
Shale and lime	3649	3875
Lime	3875	3917
Lime and shale	3917	4225
Lime	4225	4415
Lime with chert streaks	4415	4451 TD

RECEIVED  
 STATE CORPORATION COMMISSION  
 NOV 17 1964  
 CONSERVATION DIVISION  
 Wichita, Kansas

I hereby certify that this is a true and correct log of the above  
 captioned well as shown by the daily drilling reports.

  
 Ralph Schuyler

Subscribed and sworn to before me this 16th day of November, 1964.

My commission expires March 21, 1966

  
 Notary Public