


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Harper County, Sec. 6 Twp. 31 Rge. (E) 9 (W)

Location as "NE/CNW/SW" or footage from lines C SE SW
Lease Owner John C. Graves - Consolidated Oil & Gas
Lease Name Jacobs Well No. 1
Office Address 505 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 9-18-70 19
Application for plugging filed " 19
Application for plugging approved " 19
Plugging commenced " 19
Plugging completed " 19
Reason for abandonment of well or producing formation Dry Hole

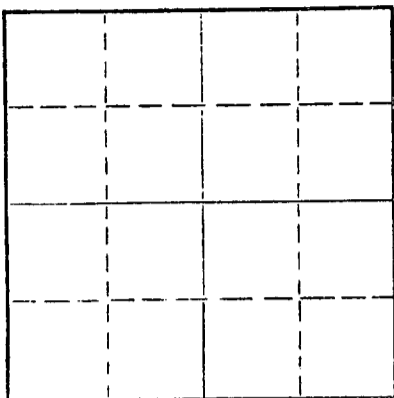

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4485 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	234	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded hole to 230' with 1/2 sack hulls, plug with 25 sacks cement
Mudded hole to 40' with 1/2 sack hulls, plug with 10 sacks cement
2 sacks cement in rathole

RECEIVED
STATE CORPORATION COMMISSION
SEP 23 1970
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Graves Drilling Co., Inc.
Address 505 Union Center, Wichita, Kansas



Kansas, COUNTY OF Sedgwick ss.
John C. Graves (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves, President
505 Union Center, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 22 day of September, 19 70

Mary Ann Scott
Notary Public.

My commission expires July 28, 1974

ROTARY DRILLERS' LOG

OPERATOR: John C. Graves - Consolidated Oil & Gas
505 Union Center
Wichita, Kansas

DRILLING COMMENCED: 9-10-70

CONTRACTOR: Graves Drilling Co., Inc.
505 Union Center
Wichita, Kansas

DRILLING COMPLETED: 9-18-70

CASING RECORD: 8 5/8" Surface Casing set
at 234' with 122 sacks of
cement.

LOCATION: C SE SW
Section 6-31S-9W
Harper County, Ks.

0	-	105	Sod & sand
105	-	160	sand - clay
160	-	220	red bed
220	-	914	red bed & shale
914	-	1538	shale & shells
1538	-	2587	lime & shale
2587	-	2650	shale & sand
2650	-	2840	shale & sand
2840	-	3185	lime & shale
3185	-	3444	lime
3444	-	3622	lime & shale
3622	-	3790	shale & sand
3790	-	4395	lime
4395	-	4478	shale & lime
4478	-	4485	total depth lime

I hereby certify that the foregoing statements are true and correct, to the best of my knowledge.

Graves Drilling Co., Inc.

RECEIVED
STATE CORPORATION COMMISSION
SEP 23 1970
CONSERVATION DIVISION
Wichita, Kansas



John C. Graves

STATE OF KANSAS)
SEDGWICK COUNTY)

Subscribed and sworn to before me, a Notary Public, on this 22nd day of September, 1970.

My commission expires July 28, 1974



Mary Ann Scott, Notary Public