

15-077-00108-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Harper County, Sec. 11 Twp. 31 Rge. 9 (W)

Location as "NE/CNW/SW" or footage from lines SE-NW-NE

Lease Owner Barbara Oil Company

Lease Name E. M. Schooley Well No. 1

Office Address 509 Union Center, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed March 4, 19 71

Application for plugging filed February 26 19 71

Application for plugging approved March 1 19 71


Plugging commenced March 13 19 71

Plugging completed March 13 19 71

Reason for abandonment of well or producing formation No longer economically feasible to produce

If a producing well is abandoned, date of last production March 9, 19 71

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YEs

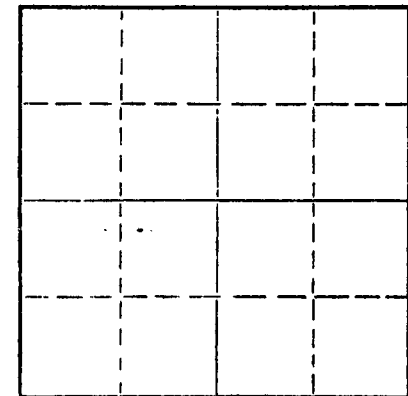

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation Mississippi Depth to top 4395 Bottom 4437 Total Depth of Well 4437 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	357'	-0-
				4 1/2"	4397'	3700'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Gravel to 4387'
4 sx. cement on top to 4337'
Mud to 260'
Bridge at 260' W/ cement to surface.
Job complete at 1:00 P.M. 3-13-71

RECEIVED
STATE CORPORATION COMMISSION
APR 1 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Clarke Oilfield Service
Address P.O. Box 187, Medicine Lodge, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

R. Douglas Myers (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Douglas Myers

509 Union Center, Wichita, Kansas 67202

(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of March, 19 71

Doris Oglesbee
Doris Oglesbee
Notary Public.

My commission expires August 12, 1971

ROTARY DRILLING LOG

OPERATOR: The Texas Company
 Schooley No. 1
 SE NW NE Sec. 11-313-9W,
 Harper County, Kansas

CONTRACTOR: Prime Drilling Company
 COM: 2/19/59
 CONP: 3/1/59

Remarks: Set 6-5/8" surface pipe at
 997' cemented with 275 sacks
 cement

Formations:

Sand & Shale	105'
Shale & Sand	165'
Shale & Shells	357'
Shale & Red Bed	715'
Shale & Shell	1110'
Shale & Lime	1575'
Lime	2150'
Shale & Lime	2890'
Lime & Shale	3025'
Lime	3570'
Lime & Sand	3685'
Lime	4215'
Lime & Shale	4295'
Lime	4407'
Chat	4437'
Rotary Total Depth	4437'

Set 4-1/2" casing at 4397' cemented
 with 100 sacks Foxmix.

We certify the above log is true and
 correct to the best of our knowledge
 and belief.

PRIME DRILLING COMPANY

R.R. McNeisel

R. R. McNeisel