


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

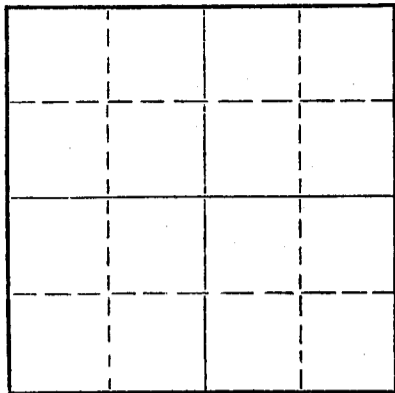

Locate well correctly on above
Section Plat

Harper County. Sec. 11 Twp. 31S Rge. 9W (E) (W)
Location as "NE/CNW/SW" or footage from lines NW NW NW
Lease Owner Ferguson Oil Company
Lease Name Snyder Well No. 1
Office Address 522 Union Center
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed 11/8/61 19
Application for plugging filed 19
Application for plugging approved 4/10/62 19
Plugging commenced 4/6/62 19
Plugging completed 4/12/62 19
Reason for abandonment of well or producing formation Depletion

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred W. Hampel
Producing formation Mississippian Depth to top Bottom Total Depth of Well 4465 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	4519'	3475'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with sand from 4465 to 4440 and 5 sacks cement mud from 4410' to 240'. Rock Bridge and cement from 240' to 180'. Mud from 180' to 40'. Rock Bridge and 10 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

MAY 14 1962

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn & Smith Pipe Pulling Co.
Address Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
L. Wendell Knox (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *L. Wendell Knox*
522 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of May, 1962

My commission expires May 11, 1963

Marquette Dickey
Notary Public.



WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY


Company- WILKINSON DRILG. CO., INC., ET AL
Farm- Snyder No. 1

SEC. 11 T. 31 R. 9W
NW NW NW

Total Depth. 4520'
Comm. 1-4-57 Comp. 1-17-57
Shot or Treated.
Contractor. Wilkinson Drilg., Inc.
Issued. 10-26-57

County Harper

KANSAS



Elevation. 1684 DF

Production. 32 MOPD & 635,000 CFG

Figures indicate Bottom of Formations.

red beds-shale	245
red beds-shale-shells	860
shale-shells	1278
Anhydrite	1300
shale-shells	1445
lime-shale	2035
lime	2155
lime-shale	2990
lime	3610
sand-shale	3704
lime	4320
shale	4416
Mississippian chert	4520
Total Depth	

TOPS: Scout	
Douglas sand	3612
Lansing	3697
B/Kansas City	4210
Mississippi	4417