


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

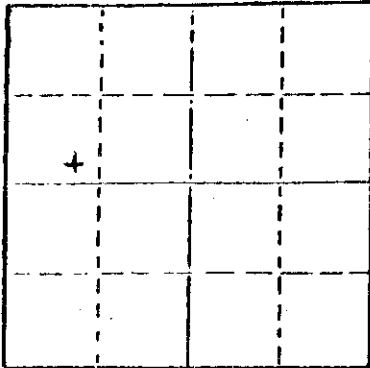

Locate well correctly on above
Section Plot

County. Ellis Sec. 2 Twp. 12 Rge. 18W E/W
Location as "NE/CNW1SW1" or footage from lines

SE SW NW
Lease Owner Flatland Oil Company

Lease Name D. Walters Well No. 3

Office Address Box 13 Catherine, Kansas 67627

Character of Well (Completed as Oil, Gas or Dry Hole)

Used as salt water disposal since 11-16-72

Date Well completed 12-28-63 19

Application for plugging filed 7-7-81 19

Application for plugging approved 19

Plugging commenced 7-10-81 10AM 19

Plugging completed 7-10-81 11.55 AM 19

Reason for abandonment of well or producing formation

Lack of oil production

If a producing well is abandoned, date of last production

Unavailable 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt

Producing formation 3666 Depth to top 3660 Bottom 3666 Total Depth of Well 3675

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Anhydrite		1387		8 5/8	163ft	None
Heebner		3103	3335			
Kansas City		3377	3622			
Conglomerate		3630				
Arbuckle		3613	3675	5 1/2	3660	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set. Total contents put in the 5 1/2 . 225 sax Poz Mix

1 1/2 Gel 3 3/4 Cc Cl. 1 sax hulls. released plug put 100 sax 1 sax hull this filled hole to 25 1/4 feet from top. Mixed 1 1/2 yd Ready Mix and filled to top. Completed plugging with 50 sax cement and 1 sax hulls. This brought cement between surface pipe and oil string to bottom of the cellar.

7-17-81

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor

STATE OF Kansas COUNTY OF Ellis, ss.

Delbert Thaltus (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) x Delbert Thaltus

SUBSCRIBED AND SWORN TO before me this 16th day of July, 19

My commission expires 3-30-85 Notary Public.

