

15-077-20386-00-00

STATE OF KANSAS CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely Make Required Affidavit Mail or Deliver Report to Conservation Division State Corporation Comm. 245 North Water Wichita, KS 67202

HARPER County. Sec. 5 Twp. 31 Rge. 7E/W Location as "NE/CNW/SW" or footage from lines 150 SW NW NW

Lease Owner Pickrell Drilling Lease Name Wolf Well No. E-1

Office Address 205 Litwin Bldg., 110 N market Wichita Character of Well (Completed as Oil, Gas or Dry Hole) Gas Well

Date Well completed 10-23-1976 Application for plugging filed 3-26-1979 Application for plugging approved 3-27-1979 Plugging commenced 4-21-1979 Plugging completed 4-25-1979

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 12-13-78 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William Owens Producing formation Miss. Depth to top 4367 Bottom Total Depth of Well 4794 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Row 1: Mississippi, Oil & Water, 4369, 4373, 8 5/8, 216, NONE. Row 2: 4 1/2, 4447, 3614.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

SAND FROM 4405 to 4340. 4 SACKS CEMENT FROM 4340 to 4300. Built BRIDGE AT 240. 5 YARD READY MIX.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor CLERKE CORPORATION

STATE OF Kansas COUNTY OF Sedgwick, ss. Jack Gurley (employee of owner) or operator

the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well filed and that the same are true and correct. So help me God.

(Signature)

Handwritten signature of Jack Gurley



205 Litwin Building, 116 N Market, Wichita, Kansas 67202

SUBSCRIBED AND SWORN TO before me this 1st day of October 1979

Handwritten signature of Carlene Lee

Carlene Lee Notary Public.

commission expires March 8, 1983

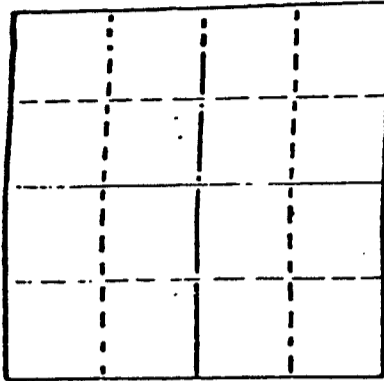

Locate well correctly on above Section Plat

ROTARY DRILLING LOG

15-077-20386-00-00

COMPANY: PICKRELL DRILLING COMPANY  
205 LITWIN BLDG.  
WICHITA, KS. 67202  
LOCATION: Wolf "E" #1  
150' SW NW NW Sec. 5-31S-7W  
Harper Co., Ks.

Rotary Drilling Commenced 10-23-76

Rotary Drilling Completed 12-13-76

CONTRACTOR: PICKRELL DRILLING COMPANY  
Wichita, Kansas

CASING RECORD: 8 5/8" surface casing set at 216' with 175 sx.  
4 1/2" set at 4457' with 125 sx.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

Top Soil & Clay	35
Sand	100
Red Rock	219
Shale	720
Shale & Lime Stks.	1320
Shale & Lime	1604
Lime & Shale	1815
Lime & Shale	2055
Shale & Lime	2225
Lime & Shale	2415
Lime & Shale	2600
Shale & Lime	2790
Lime & Shale	2950
Lime & Shale	3160
Lime & Shale	3400
Lime	3545
Shale & Lime	3615
Lime	3675
Lime	3730
Lime & Shale	3805
Lime	3890
Lime	3990
Lime	4068
Lime	4133
Lime	4200
Lime & Shale	4260
Lime & Shale	4314
Lime	4380
Lime	4395
Lime	4470
Lime	4540
Lime	4590
Lime & Shale	4643
Lime & Shale	4710
Lime	4745
Lime	4756
Lime	4761
Lime	4794

RECEIVED  
STATE COMMISSION COMMISSION

MAR 27 1979

CONSERVATION DIVISION  
Wichita, Kansas

03-27-1979

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY

By [Signature]  
Attorney-in-Fact  
C. W. Sebitts


STATE OF KANSAS }  
COUNTY OF SEDGWICK } ss.:

On this 18 day of January, 1977, before me the undersigned, a Notary Public, in and for

the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires:



[Signature]  
Notary Public

Jo Ann Sarver