


15-1165-30006-0000

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

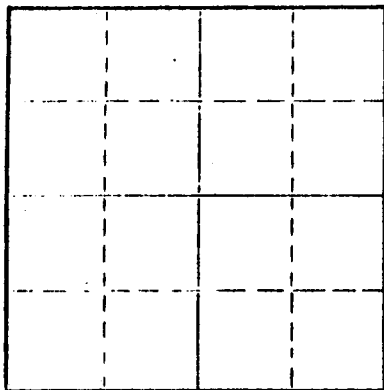

Locate well correctly on above
Section Plat

Rush County, Sec 35 Twp. 19 Rge. 20 (E) W (W)
Location as "NE/CNW&SW¼" or footage from lines C NW/4 NW/4
Lease Owner Shields Oil Producers, Inc.
Lease Name Miller "D" Well No. 1
Office Address Shields Bldg., Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed March 18 19 65
Application for plugging filed March 18 19 65
Application for plugging approved March 18 19 65
Plugging commenced March 18 19 65
Plugging completed March 18 19 65
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,385 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	350 ^s	Cmtd w/ 250 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill w/ heavy mud to 540^s
Set bridge plug @ 540^s
Dump 20 sax cement on plug thru 4 1/2" drill pipe
Fill w/ heavy mud to 300^s
Set bridge plug @ 300^s
Dump 20 sax cement on plug thru 4 1/2" drill pipe
Fill w/ heavy mud to 40^s
Set bridge plug @ 40^s w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
MAR 26 1965
3-26-65
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Bldg., Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
R. L. Shields (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Shields, Vicepres.
Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of March, 19 65

My commission expires September 27, 1967
Velma Underwood Notary Public.




15-165-30006-0000
Shields

Russell, Kansas

WELL LOG

Operator: Shields Oil Producers, Inc.
Well: Miller "D" #1
Commenced: March 8, 1965
Completed: March 18, 1965
Contractor: Shields Drilling Co., Inc.

Well Description: C NW NW
Sec. 35-19S-20W
Rush Co., Kansas



Size	CASING RECORD	
	Run	Pulled
8 5/8"	350'	Cmtd w/ 250 sax

Elevation: 2,270' RB
Treatment:

Production: D&A

Tops:

Heebner	3,754'
Lansing-KC	3,797'
Pawnee Lime	4,254'
Cherokee Sh.	4,262'
Cherokee Sd.	4,280'
Mississippi Chert	4,354'

..... Figures Indicate Bottom of Formations

Surface soil, clay, sand & shale	350'
Shale, shells & sand streaks	857'
Redbed	1,069'
Shale, shells & sand	1,435'
Anhydrite	1,467'
Redbed, shale & salt	1,960'
Shale & lime	2,610'
Lime	2,735'
Lime & shale	3,273'
Lime	3,340'
Lime & shale	3,600'
Lime	4,385' RTD

RECEIVED
STATE CORPORATION COMMISSION
MAR 26 1965
3-26-65
CONSERVATION DIVISION
Wichita, Kansas

Notes