

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-191-21985-00-00
Spot: SWSESE Sec/Twnshp/Rge: 13-31S-2W
330 feet from S Section Line, 990 feet from E Section Line
Lease Name: WILKERSON Well #: 1
County: SUMNER Total Vertical Depth: 3778 feet

Operator License No.: 30375
Op Name: GRESSEL, DEWEY H.
Address: 322 W 20TH ST S
WELLINGTON, KS 67152

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	3774		75 SX
SURF	8.625	321		210 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/17/2013 8:00 AM
Plug Co. License No.: 3004 Plug Co. Name: GRESSEL OILFIELD SERVICE, LLC
Proposal Rcvd. from: DICK SCHREMMER Company: GRESSEL OFS Phone: (620) 434-5322

Proposed Plugging Method: SET CIBP 3750' & 25 SKS CEMENT. SHOOT 4 HOLES AT 370' & CIRCULATE CEMENT TO 0'.

Plugging Proposal Received By: JEFF KLOCK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 07/17/2013 9:30 AM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

A CIBP WAS SET AT 3750' & CAPPED WITH 2 SKS CEMENT. THE CASING WAS PERFORATED WITH 4 HOLE AT 370' & CEMENT WAS CIRCULATED WITH 385 SX CEMENT. CEMENT FELL, WILL TOP OFF WITH REDI MIX SLURRY.

Perfs:

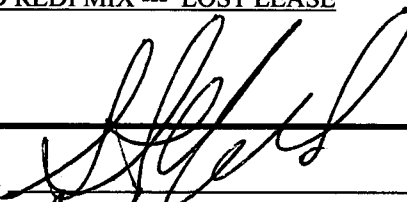
Top	Bot	Thru	Comments
3774	3778	OH	

RECEIVED
KANSAS CORPORATION COMMISSION
AUG 27 2013
CONSERVATION DIVISION
WICHITA, KS

Remarks: COPELAND ACID & CEMENT 2 1/2 YARD REDI MIX --- LOST LEASE

Plugged through: CSG

District: 02

Signed 
8/29/13 (TECHNICIAN)