

15-165-31891-0005

CP3

KANSAS  
STATE CORPORATION COMMISSION

## CONSERVATION DIVISION AGENT'S REPORT

TO:

Jewel M. Ogden, Director  
500 Insurance Building  
212 North Market  
Wichita 2, KansasFile No. 104-53 County: RushLocation: NW NE SE Sec. 17 Twp. 19 Rge. 20 (E) (W)Name of Field: \_\_\_\_\_ Total Depth: 4500 4500

I have this date completed supervision of plugging of:

Lease Name: Schneider Well No. 1Operator's Full Name: Drillers & Producers Pipe & SupplyComplete Address: c/o West Supply Co Box 500 Chase, KansPlugging Contractor: West Supply CoAddress: Chase, Kans License No. 14Oil Well \_\_\_\_\_ Gas Well \_\_\_\_\_ Input Well \_\_\_\_\_ SWD Well \_\_\_\_\_ D & A X

Other well as hereafter indicated: \_\_\_\_\_

Was any delay in plugging operations caused by Conservation Division Agent? Yes \_\_\_\_\_ No \_\_\_\_\_

If yes how long? \_\_\_\_\_ Reason: \_\_\_\_\_

Operation Completed: Hour 5PM Day 10 Month 6 Year 58

The above well was plugged as follows:

8 5/8" at 500' circulated with cement. 5 1/2" 4500' with 100 sax cement  
behind - perforated 4510'.Filled with sand to 4500', set 4 sax cement with dump bailer, pulled  
2570', 5 1/2" to 700', circulated hole with heavy mud (Gel), displaced  
20 sax cement through 5 1/2" at 500', heavy mud to 280', displaced 20 sax  
cement through 5 1/2" at 280', heavy mud to 55', set rock and 10 sax  
cement to 0'.Mudding and Cementing by West Supply Pump truck.


Signed: \_\_\_\_\_

Conservation Division Agent

Reviewed: \_\_\_\_\_

Field Supervisor

Remarks: \_\_\_\_\_

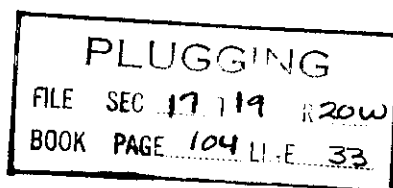

JUN 17 1958

6-17-58

CONSERVATION DIVISION

Wichita, Kansas