

15-135-20822-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

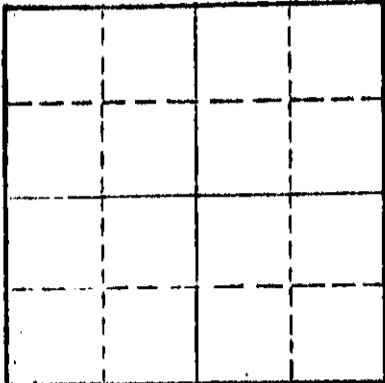

Locate well correctly on above
Section Flat

Ness County. Sec. 10 Twp. 16 Rge. 26 (E) (W)
Location as "NE/CNW/SE" or footage from lines SW SE NE
Lease Owner Patrick Petroleum Company
Lease Name Jarvis No. 1 Well No. 1
Office Address 330 Page Court
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12/4/73 19
Application for plugging filed 12/4/73 19
Application for plugging approved 12/4/73 19
Plugging commenced 12/4/73 19
Plugging completed 12/4/73 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 4510' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"			8-5/8"	308'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 800' and 70 sacks
Plug @ 240' and 20 sacks
Plug and hull bridge @ 40' and 10 sacks
Complete @ 9:15 a.m. 12/4/73



(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Slawson Drilling Company, Inc.
Address 408 One Twenty Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.
James C. Rensberg (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James C. Rensberg
James C. Rensberg, Vice-President
408 One Twenty Building, Wichita, Kansas (Address)



Subscribed and sworn to before me this 10 day of December 1973
Mary Lou Taylor
Notary Public

DRILLERS LOG

COMPANY: Patrick Petroleum Company
330 Page Court
Wichita, Kansas 67202

Elevation: 2626 K.B.

LEASE NAME: Jarvis No.1
SW SE NE
10-16-26W
Ness County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
408 One Twenty Building
Wichita, Kansas 67202

Total Depth: 4610'

Commenced: 11/23/73

Completed: 12/4/73

Casing: 308' @ 318', set with 250 sax cement

0-318 Sand and Shale
318-510 Shale and Shells
510-1541 Shale and Shells
1541- 1820 Sand
1820-2051 Shale
2051-2089 Anhydrite
2089-2548 Shale and Lime
2548-2730 Lime and Shale
2730-4070 Lime and Shale
4070-4130 Lime
4130-4224 Lime and Shale
4224-4381 Lime
4281-4385 Lime and Shale
4385-4555 Lime
4555-4573 Lime and Chert
4573-4584 Miss
4584-4610 Miss

RECEIVED
STATE CORPORATION COMMISSION
DEC 14 1973
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Jarvis No.1 well.

James C. Remsberg
James C. Remsberg

Subscribed and sworn to me on December 10, 1973

Mary L. Taylor
(Notary) Mary L. Taylor

My commission expires January 17, 1977

